

M12 Field Attachable Connectors (DUO)


RSC...DUO | RKC...DUO



Male, 4- and 5-Pole


Field attachable connector, M12 Duo male connector, 4- and 5-pole with threaded joint, for two cable connections, assembling with screw terminals.

RSC...DUO

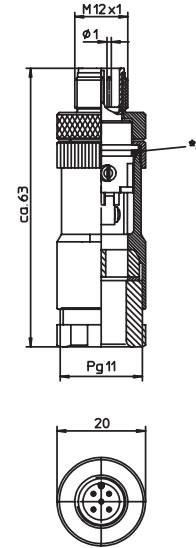

*a O-Ring

RKC...DUO

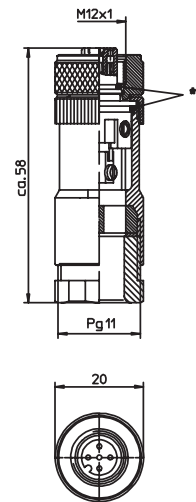

*a O-Ring




Female, 4- and 5-Pole

Field attachable connector, M12 Duo female connector, 4- and 5-pole with threaded joint, for two cable connections, assembling with screw terminals.


Pin Assignments

Face Views / M12, Male / Female

4 pole



5 pole





Be Certain with Belden

M12 Field Attachable Connectors (DUO)

RSC...DUO | RKC...DUO

Technical Data

Environmental


Degree of protection	IP 67 / NEMA 6P
Operating temperature range	-25°C (-13°F) / +90°C (+194°F)

Mechanical

Housing / Molded body	PBT
Insert	PBT
Contact	CuZn, pre-coppered, CuSnZn
Receptacle shell	CuZn, nickel plated
O-ring	FKM
Mode of connection	Screw terminals
Connectable conductor	max. 0.75 mm ²

Electrical

Contact resistance	≤ 5 mΩ
Nominal current at 40°C	4 A
Nominal voltage	4 poles 240 V
	5 poles 60 V
Rated voltage	4 poles 250 V
	5 poles 63 V
Test voltage	4 poles 2.0 kV eff. / 60 s
	5 poles 1.5 kV eff. / 60 s
Insulation resistance	> 10 ⁹ Ω
Pollution degree	3

Part Number		Pins	Cable Diameter Range	Characteristics
Male	Female			
RSC 4/DUO	RKC 4/DUO	4	2 x 3 mm / 2 x 5 mm	
RSC 5/DUO	RKC 5/DUO	5	2 x 3 mm / 2 x 5 mm	