


# BEK-R33-E5T-K-BS

## Ringlight




- High-performance flash with integrated flash controller
- Easy mounting on CS 50
- Focus optics and polarizer available as an option
- Y-cable (CS-Y ) available as an option for simple electrical mounting on CS 50
- Automatic trigger signal by Vision Sensor CS 50

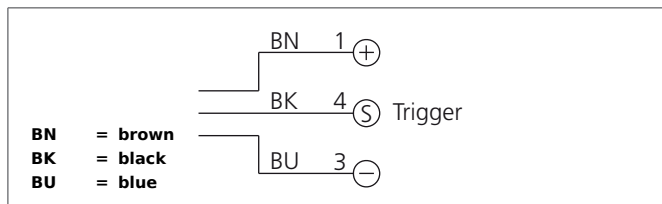

### Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.  
 These instruments shall exclusively be used by qualified personnel.

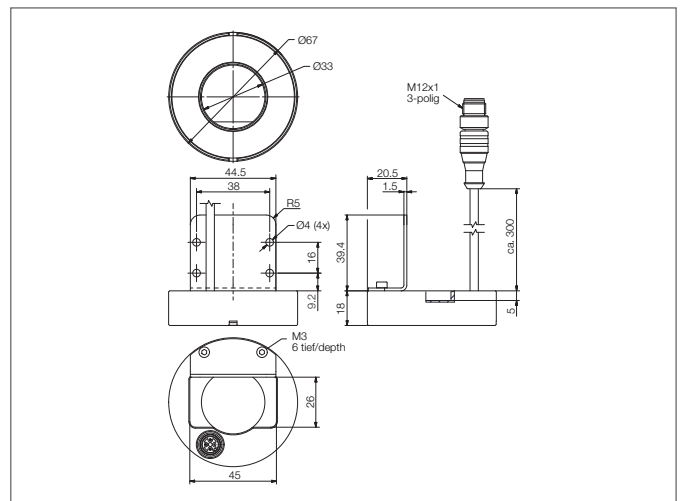

TECHNICAL INFORMATION (typ.)		+20°C
设计		环形光源
光的颜色		White, 6000 K
发射角度		80 °
照明密度		51.0 klx (0.1 m), 7.1 klx (0.3 m), 2.5 klx (0.5 m)
工作电压		22,8 ... 25,2 V DC
内部功耗		< 10 mA, (Standby), 950 mA, (pulse)
输入低电平触发		0 < 2,8 V
输入高电平触发		> 3.3 30 V
周期		50 ms
功率		23,0 W (24 V)
极性接反保护		是
环境温度		0 +40 ° C
防护等级		IP 67
防护等级		III,在保护性低电压下工作
危险类 (DIN EN62471标准)		Free group
外壳材料		Aluminium black anodized
材料		PMMA, clear (保护光元件)
连接		Cable, 0,3 m, with connector, M12, 3-poled
Frequency		20 Hz (max.)
Illumination time / pulse		2 ms