


BE-DOME60/50-RGB-T4

Dome light




- Three separated high-power channels in R/G/B
- Exceptionally homogenous and diffuse illumination
- 非常简约的设计
- High light intensity
- 结实耐用的设计

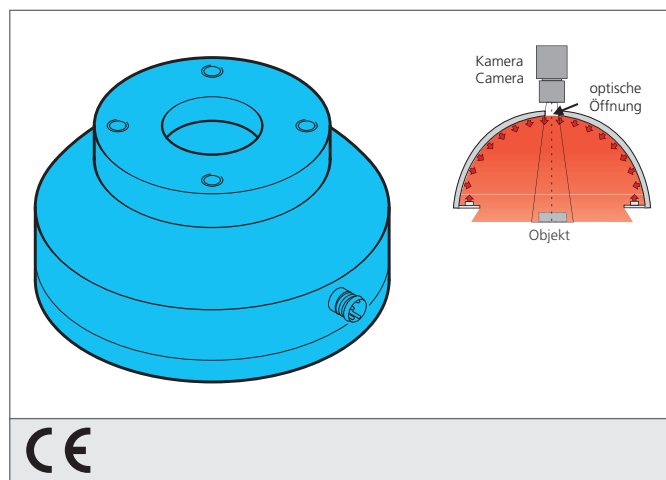

Blick auf Anschlusseite View on connection position	PIN	Aderfarbe wire color	Funktion function
	4	schwarz / black	- rot / red
	2	weiß / white	- grün / green
	3	blau / blue	- blau / blue
	1	braun / brown	+ 24V

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

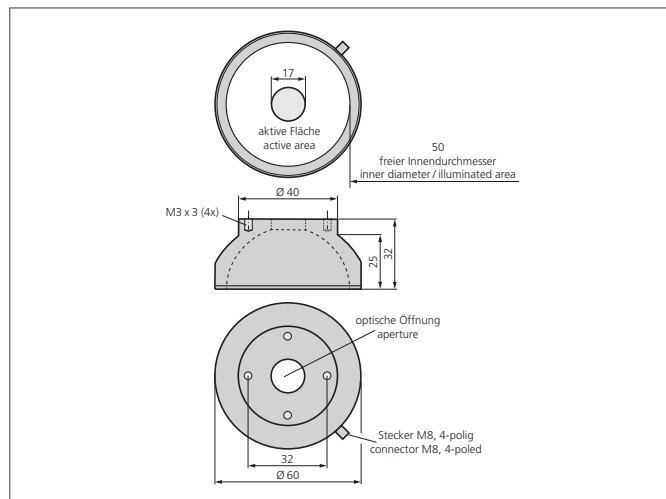

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
尺寸	60 mm (直径)	
照明区域	50 mm	
数量	20 LEDs	
光的颜色	RGB, 630 nm, 530 nm, 470 nm	
发射角度	120 °	
工作电压	24 V DC	
功率	1,2 W (24 V DC)	
功率消耗	150 mA / 3 Colors ($\Sigma < 3,6 \text{ W}$)	
负载振荡	10 ... 55 Hz / 1,0 mm / 30 g	
环境温度	0 +50 ° C	
防护等级	III,在保护性低电压下工作	
危险类 (DIN EN62471标准)	Free group	
外壳材料	Aluminium, plastics	
连接	Connector, M8, 4-poled	