


BEV-200/4-IBS


Distributor box, switchable

- 4-way distributor
- M12 sockets, individually switchable
- Trigger signal looped

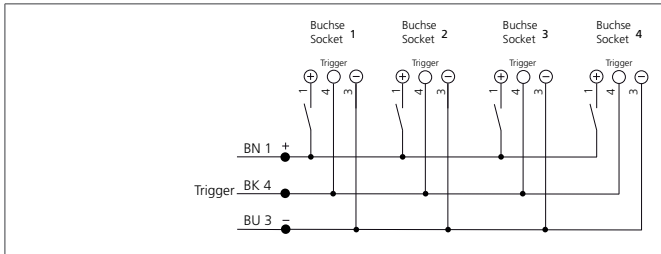

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

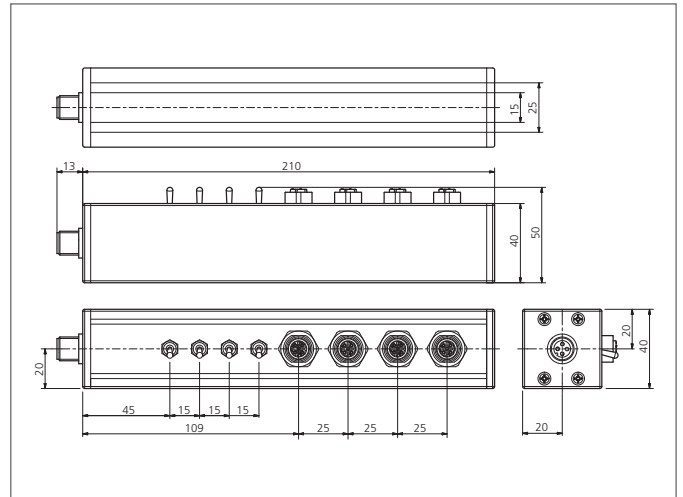

TECHNICAL INFORMATION (typ.)

Maximum rating	4000 mA, in all
Service voltage	24 V DC
Shock-/vibration load	10 ... 55 Hz / 1,0 mm / 30 g
Ambient temperature, operation	0 ... +60 °C
Protection class	IP 30
Casing material	Aluminium black anodized
Connection	Connector, M12 x 1