


Signal Light


- High light intensity thanks to most modern, highly efficient LEDs
- Easy operation even without IO-Link possible
- Per IO-Link free parameterizable functions
- Long-life thanks to intelligent thermal management
- Large light field for an optimal display of the machine status
- Can be used immediately by 3 color pre-sets: red - green - yellow
- High protection class IP 67
- Magnetic Holder Set available as an option
- Adjustable Mounting Bracket available as an option
- Attachable Diffusion filter available as an option

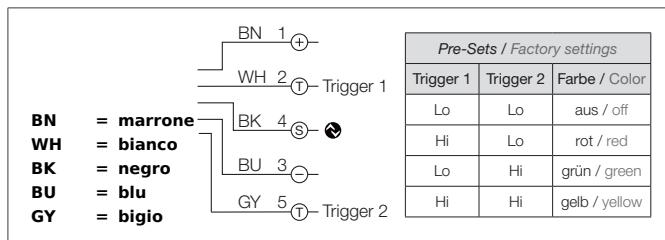

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

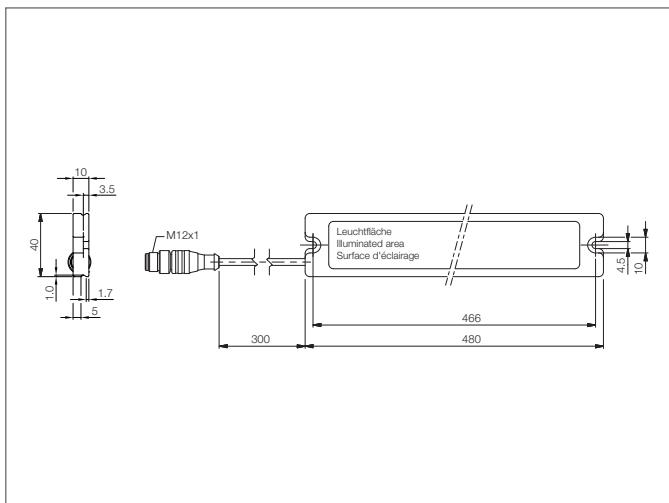

TECHNICAL INFORMATION (typ.)

Operating modes	+20°C, 24V DC
Illuminated area	constant, blink, flash
Light colour	30 x 440 mm
Emission angle FWHM	RGB + custom
Service voltage	120°
No-load current	24 V DC ± 5%, (Supply Class 2)
Trigger input low level	385 mA RMS / 750 mA Peak, (24 V DC)
Trigger input high level	< 5,0 V
Trigger input	> 8,0 V
Interface	3 color pre-sets: selectable by Trigger 1 + 2
Power	IO-Link, V1.1, COM2 (38,4kBd), 2300 µs, for parameterization
Inverse polarity protection	9,2 W (24 V DC)
Ambient temperature, operation	Yes
Protection class	0 ... +40 °C
Protection degree	IP 67
Risk group (DIN EN 62471)	III, operation on protective low voltage
Casing material	Free group
Material	Aluminium nature anodized
Connection	PU, crystal clear (Window)
Light intensity can be adjusted	Cable, 0,3 m, with connector, M12, 5-poled
Weight	10 ... 100%, by IO-Link
Connecting cable	390 g
Cable length max.	VK ... /5
	10.0 m, (5 x 0.34 mm ² / 24.0 V DC)