


## CS-Y-0.3/12-A Y-Verteilerkabel


- Durable PU coating
- Flexible lead design
- High protection class IP 67
- Metal plug

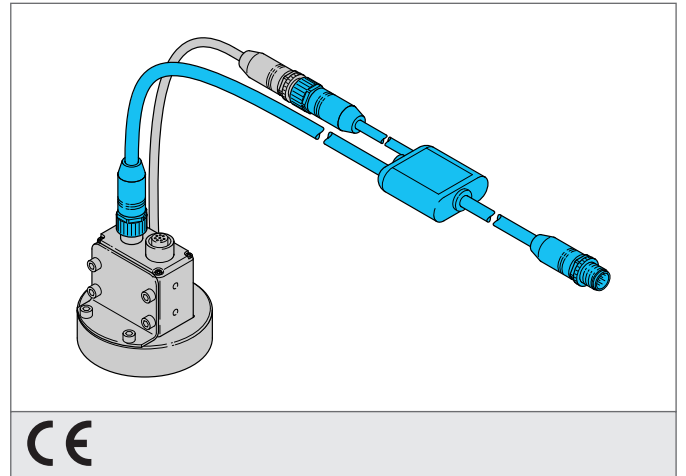

CE

### Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.  
These instruments shall exclusively be used by qualified personnel.

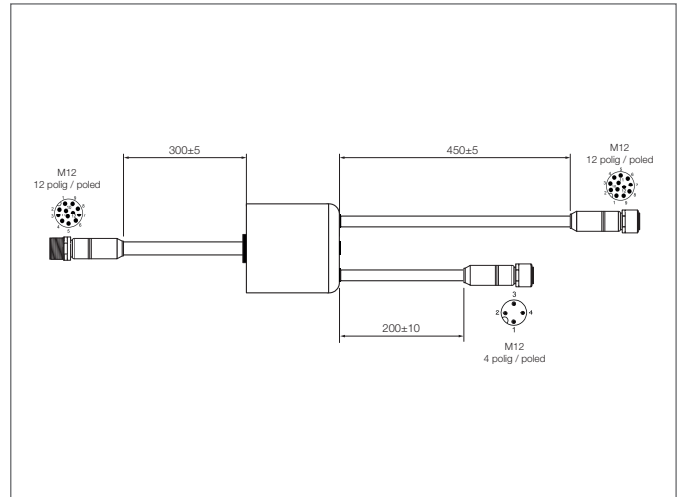

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Service voltage	< 30 V DC
Ambient temperature, operation	-20 ... +85 °C
Protection class	IP 67
Casing material	plastics
Material	PUR (Cable)
Connection	Connector, M12, 12-poled
Connection 2	Socket, M12, 4-poled, 12-poled
Note	IN & OUT remains on PNP (CS50)
Operating current	< 1,5 A DC
External lighting trigger (pnp)	Either OUT 3 (CS 50 ...) or PIN 6 (connector M 12)