

# VP 1000

## Multifunctional control panel

- Customizable visualisation/manipulation of camera inspections
- 10,1" WXGA, 1280x800 pixel, 425cd/m
- Capacitive Multi Touch
- For all Vision Sensors CS50
- No internal fan




### Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.  
These instruments shall exclusively be used by qualified personnel.

#### OPEN SOURCE SOFTWARE NOTICE

Please note we use Open Source Software along with this product and/or this product firmware.  
For more Details please visit: [www.di-soric.com/licenses](http://www.di-soric.com/licenses)

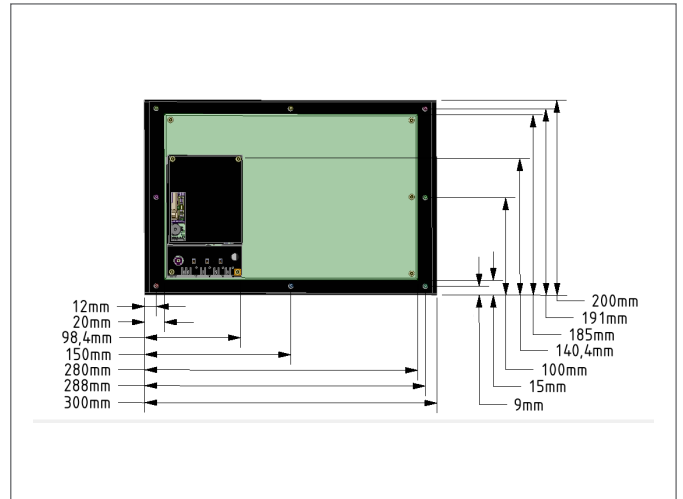

### TECHNICAL INFORMATION (typ.)

安装	用螺丝固定 M4 (6x)
操作原理	触摸屏显示器
工作电压	9 ... 30 V DC
接口	telnet, RESET Api, http
环境温度	0 +50 °C
防护等级	IP 65, 前端
为了	Vision sensors - CS 50
连接	RJ 45, (network)
Connection 2	Connector, 2-poled
Data communication to the camera	All variables linked to AutoVision can be displayed / manipulated
Functions	Communication with camera (CloudLink- / Telnet based), Change of camera job via touchscreen, Manipulation of camera settings via touch screen, Manipulating a job over all link variables / no
Languages	German, English, French
Display diagonal	10,1"