

## VP 700

### Multifunctional control panel

- Customizable visualisation/manipulation of camera inspections
- 7" WVGS, 800x480 Pixel, 350cd/m<sup>2</sup>
- Capacitive Multi Touch
- For all Vision Sensors CS50
- No internal fan



#### Safety instructions


The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

#### OPEN SOURCE SOFTWARE NOTICE

Please note we use Open Source Software along with this product and/or this product firmware.

For more Details please visit: [www.di-soric.com/licenses](http://www.di-soric.com/licenses)

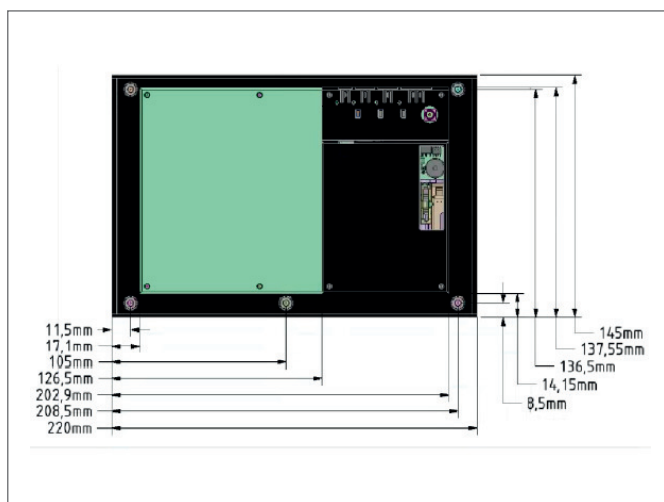

#### CARACTÉRISTIQUES TECHNIQUES (typ.)

Montage	Screw mounting M4 (6x)
Principe de fonctionnement	Moniteur à écran tactile
Dimensions	145 x 220 x 50 mm (Dimensions)
Tension d'alimentation	9 ... 30 V DC
Résolution	WVGA (800x480); 16:9; 350cd/m <sup>2</sup> ; 153 x 92 mm <sup>2</sup> (Display)
Interface	telnet, RESET Api, http
Température ambiante, fonctionnement	0 ... +50 °C
Indice de protection	IP 65, (Façade)
Approprié pour	Détecteurs de vision - CS 50
Connexion	RJ 45, (Réseau)
Connexion 2	Connecteur, 2 pôles
Data communication to the camera	All variables linked to AutoVision can be displayed / manipulated
Fonctions	Communication with camera (CloudLink- / Telnet based), Change of camera job via touchscreen, Manipulation of camera settings via touch screen, Manipulating a job over all link variables / no
Languages	German, English, French
Display diagonal	7"