
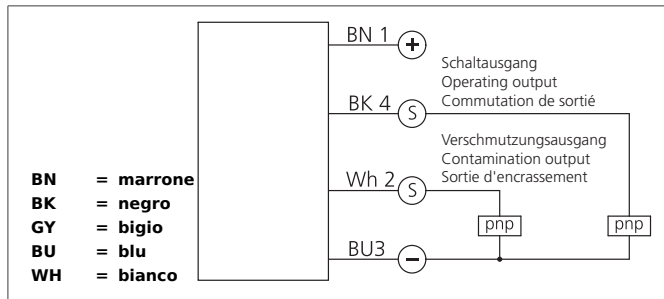


OGL 55/54-0 P6L-RIBS


High Performance Angled Light Barrier

- Intelligent contamination output with LED
- High functional reserve
- Extremely dirt-resistant
- Optical axis approachable in x-, y- and z-direction
- All-purpose mounting
- Robust metal casing

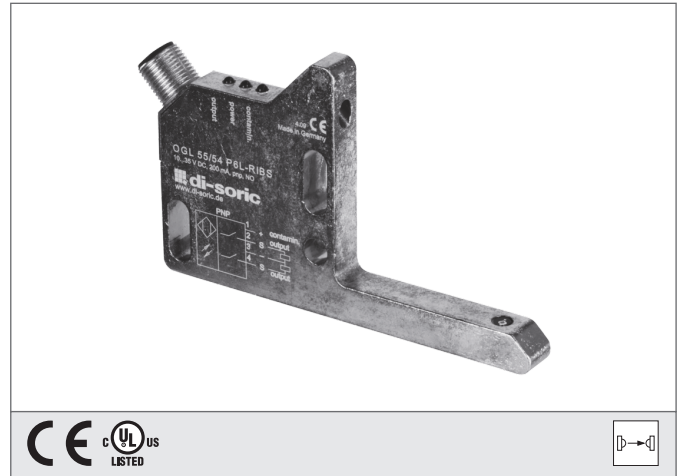

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments. These instruments shall exclusively be used by qualified personnel.

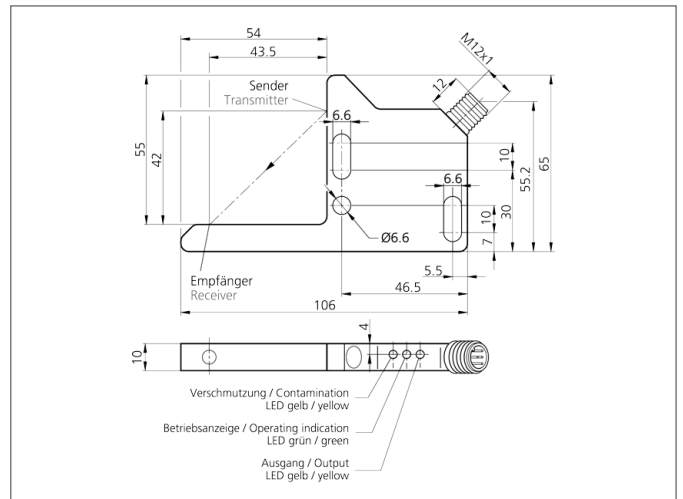

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
Operating principle		Optical
Evaluation		digital
Size		65 x 106 x 10 mm (Dimensions)
Design		Angle
Branch length inside		55/54 mm
Characteristics		High transmit power and dirt penetration
Emitted light		Infrared, 870 nm, clocked
Service voltage		10 ... 35 V DC (Supply Class 2)
No-load current		< 45 mA
Operating distance		60 mm (optical axis)
Sensitivity adjustment		no setting elements
Switching output		pnp, 200 mA, NO
Contamination output		pnp, 200 mA
Shock-/vibration load		10 ... 55 Hz / 1,0 mm / 30 g
Voltage drop		< 2,0 V
Switching frequency		100 Hz
Ambient temperature, operation		-10 ... +60 °C
Ambient light immunity		5 kLx
Insulation voltage endurance		500 V
Protection class		IP 67
Protection degree		III, operation on protective low voltage
Casing material		Die-cast zinc
Connection		Connector, M12, 4-poled

OGL 55/54-0 P6L-RIBS
High Performance Angled Light Barrier



TECHNICAL INFORMATION (typ.)

Connecting cable

+20°C, 24V DC

VK ...