


OGL 55/55 P2L-IBS

High Performance Angled Light Barrier


- Contamination indicator
- High functional reserve
- Extremely dirt-resistant
- Listed in the automobile industry
- Optical axis approachable in x-, y- and z-direction
- All-purpose mounting
- Robust metal casing

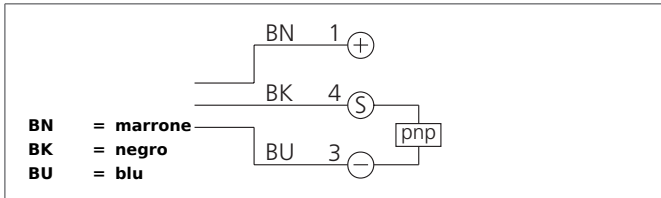

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

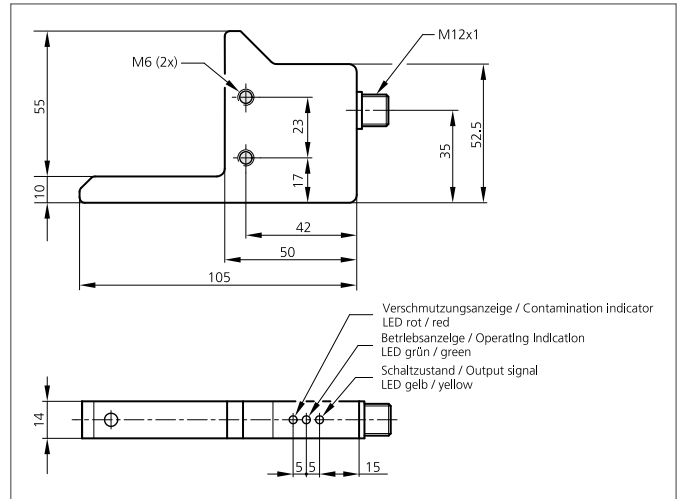

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Operating principle	Optical
Evaluation	digital
Size	65 x 105 14 mm (Dimensions)
Design	Angle
Characteristics	High transmit power and dirt penetration
Emitted light	Infrared, 880 nm
Service voltage	10 ... 35 V DC (Supply Class 2)
No-load current	< 40 mA
Operating distance	60 mm (optical axis)
Sensitivity adjustment	no setting elements
Switching output	pnp, 200 mA, NO
Shock-/vibration load	10 ... 55 Hz / 1,0 mm / 30 g
Voltage drop	< 2,0 V
Switching frequency	150 Hz
Ambient temperature, operation	-10 ... +60 °C
Ambient light immunity	5 kLx
Insulation voltage endurance	500 V
Protection class	IP 67
Protection degree	III, operation on protective low voltage
Casing material	Aluminium black anodized
Connection	Connector, M12, 3-poled
Connecting cable	TK ...