

## MS-BEC


### MS - Expansion unit

- Communication to PLC via fieldbus system EtherCAT
- Connection to a PC via USB 2.0 serial bus for a fast and easy configuration
- Connection to MS-1 master via MS-SC proprietary bus
- MS-SC connector included



#### Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.  
The set-up of the products have to be made by skilled staff, only.  
Repair exclusively made by di-soric.

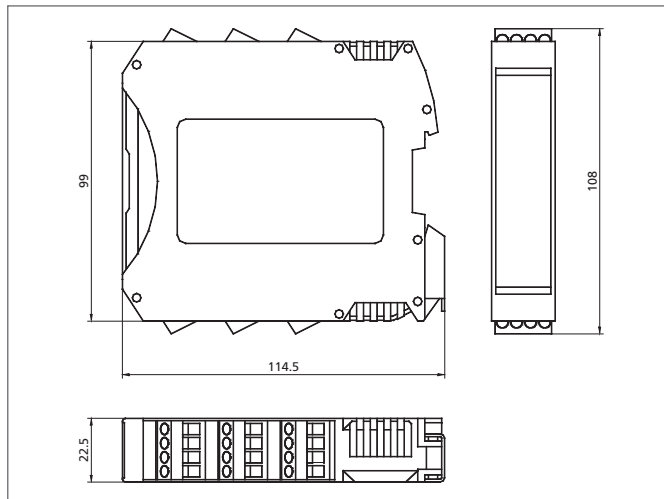

TECHNICAL INFORMATION (typ.)		+20°C, 24 V DC
Characteristic parameters		SIL 3 (IEC 61508), SILCL 3 (IEC 62061), PL e - Cat. 4 (EN ISO 13849-1)
Mounting		rail fastening according to EN 50022-35 standard
Operating principle		Bus diagnostics and data communication
Size		99 x 22.5 x 114.5 mm (Dimensions)
Service voltage		19,2 ... 28,8 V DC
Interface		USB
Display		LED for failure diagnosis
Ambient temperature, operation		-10 ... +55 °C
Protection class		IP 20, (housing), IP 2X, (terminal blocks)
Casing material		polyamide (with locking latch mounting made of metal)
Connection		removable terminal blocks, screw contacts
Communication		5-way high-speed bus 5.0
Protocols		EtherCAT
Scope of delivery		multi-language installation sheet, MS - Connector MS-SC