

MS-BEC

MS - Expansion unit



- 通过EtherCAT现场总线系统与PLC通讯
- 通过USB 2.0串行总线连接电脑进行快速和简单的配置
- 通过MS-MC专用总线连接MS-1主线
- 包含MS-MC连接线




Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.

The set-up of the products have to be made by skilled staff, only.

Repair exclusively made by di-soric.

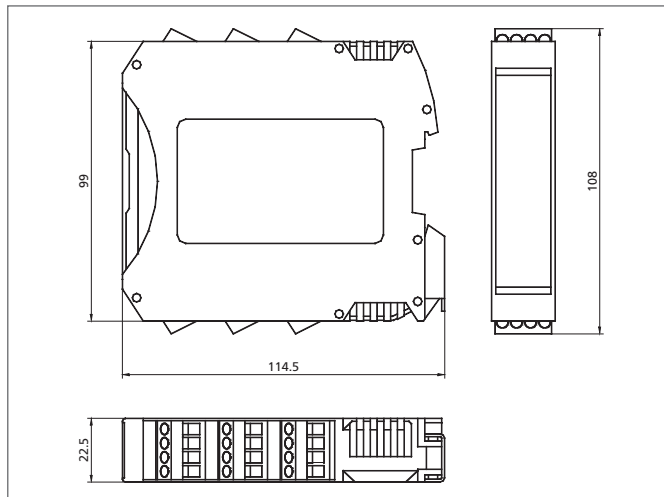

TECHNICAL INFORMATION (typ.)	
安全等级	+20°C, 24 V DC
安装	SIL 3 (IEC 61508), SILCL 3 (IEC 62061), PL e - Cat. 4 (EN ISO 13849-1)
操作原理	rail fastening according to EN 50022-35 standard
尺寸	总线诊断和数据通讯
工作电压	99 x 22.5 x 114.5 mm (尺寸)
接口	19,2 ... 28,8 V DC
显示	USB
环境温度	LED灯显示故障诊断
防护等级	-10 ... +55 ° C
外壳材料	IP 20, (housing), IP 2X, (terminal blocks)
连接	polyamide (with locking latch mounting made of metal)
通讯	removable terminal blocks, screw contacts
协议	5-way high-speed bus 5.0
交货范围	EtherCAT
	多语言安装板, MS接头-MS-SC