

## **C8D M 11**

## **Connector**

**#**di-soric

- High protection class
- Robust design
- Metal casing

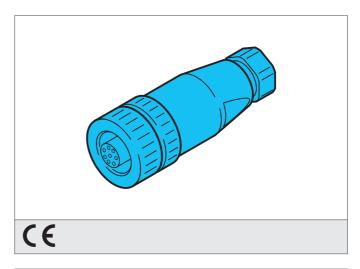




## Safety instructions

All the installation, connection and safety regulations, as per our technical  $% \left( 1\right) =\left( 1\right) \left( 1\right) \left($ 

information, have to be strictly adhered to.
The set-up of the products have to be made by skilled staff, only.
Repair exclusively made by di-soric.



TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Operating principle	Connector
Size	M12 (thread)
Design	straight
Characteristics	metal coupling ring
Protection class	IP 67
Suitable for	receiver SLI
Material	PVC (Cable)
Connection	Socket, M12, 8-poled, with screw terminal and PG9/11 cable gland