CD 20
Cable de conexión

- Tuerca de acoplamiento metálica robusta
- Cable flexible
- Buenas propiedades de aislamiento
- Elevado grado de protección

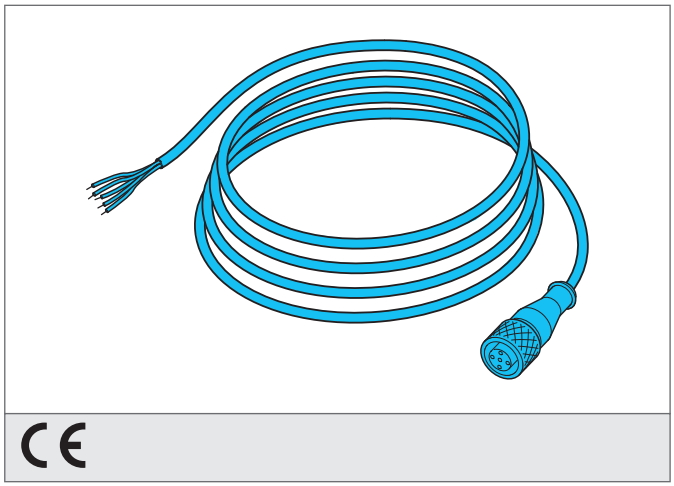

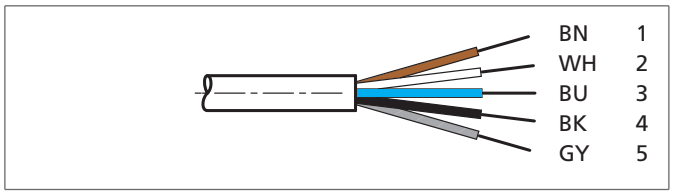

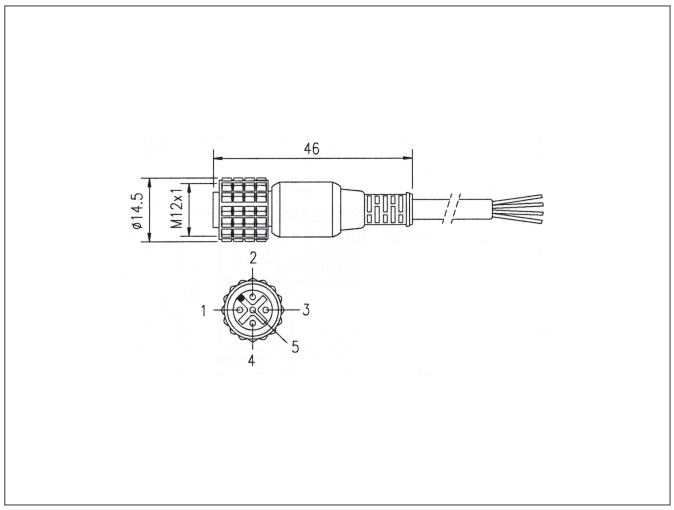

Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.
The set-up of the products have to be made by skilled staff, only.
Repair exclusively made by di-soric.

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Principio de funcionamiento	Cable de conexión
Tamaño	M12 (Rosca)
Diseño	recto
Longitud	20000 mm
Características	Anillo de acoplamiento metálico
Técnica de protección	IP 67
Apropiado para	SLB... y emisor SLI...
Material	PVC (Cable)
Conexión	Conector, M12, 5-polos, extremos abiertos

di-soric GmbH & Co. KG ■ Steinbeisstraße 6 ■ DE-73660 Urbach
Fon + 49 (0) 71 81 / 98 79 - 0 ■ Fax + 49 (0) 71 81 / 98 79 - 179 ■ info@di-soric.com ■ www.di-soric.com