



- 小尺寸的塑料外壳
- 安装简便
- 红光
- 灵敏度可调
- 高操作频率
- 亮通/暗通
- 防短路和反极性

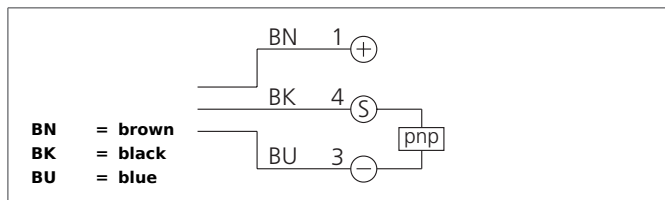

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
 These instruments shall exclusively be used by qualified personnel.

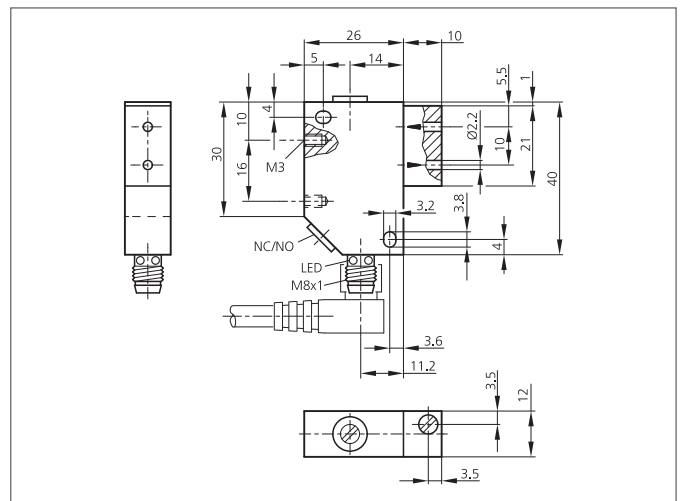

TECHNICAL INFORMATION (typ.)	
放大器	+20°C, 24V DC
评估	Plastic fiber optics 2x2,2 mm
发射光	数字的
工作电压	红色光, 660 nm, 已调制
内部功耗	12 ... 35 V DC
灵敏度调节	< 36 mA
开关输出	电位计
开关滞后	pnp, 200 mA, NO/NC, 可切换
负载振荡	< 15 %
压降	10 ... 55 Hz / 1,0 mm / 30 g
工作频率	< 2,0 V
反应时间/释放时间	750 Hz
环境温度	0,10 ms / 2,0 ms
温度漂移	0 +60 °C
环境光免疫	0,3%/K
绝缘电压	30 kLx
防护等级	500 V
外壳材料	IP 65
连接	polyester
	Connector, M8, 3-poled