



- DIN导轨可装和侧面安装孔
- 可并排安装，10mm安装间隔
- 12转金属电位计，带发光读数
- 扫描范围最高可达200mm，检测距离最高可达1500mm
- 带示教功能和手动微调功能
- 带定制功能
- 亮通/暗通，可切换

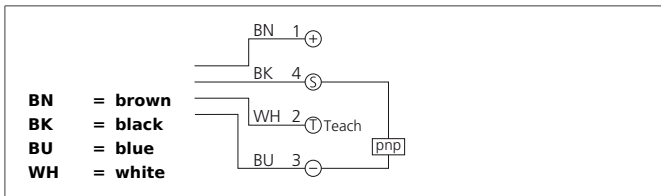

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments. These instruments shall exclusively be used by qualified personnel.

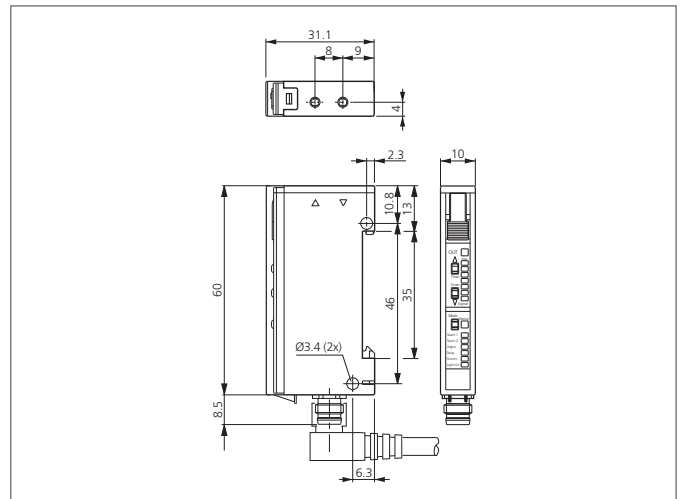

TECHNICAL INFORMATION (typ.)	
放大器	+20°C, 24V DC
评估	Plastic fiber optics 2x2,2 mm
发射光	数字的
工作电压	红色光, 660 nm, 已调制
内部功耗	10 ... 30 V DC
灵敏度调节	< 25 mA
开关输出	示教键+远程示教
开关滞后	pnp, 200 mA, NO/NC, 可切换
负载振荡	< 10 %
压降	10 ... 55 Hz / 1,0 mm / 30 g
工作频率	< 2,0 V
反应时间/释放时间	1500 Hz
环境温度	0,33 ms / 0,33 ms
温度漂移	-25 +55 °C
环境光免疫	0,2 %/K
绝缘电压	10 kLx
防护等级	5.000 V
外壳材料	IP 64
连接	plastics (PBT)
	Connector, M8, 4-poled