

MS-V2T

MS - Expansion unit

- 监控零速度控制、最大速度、速度范围和方向
- 每个轴可自由配置4个逻辑可选速度阈值
- 两个独立的轴可同时控制
- 编码器RJ-45插头
- 接近开关的接线板
- 通过MS-MC专用总线连接MS-1主线
- 包含MS-MC连接线




Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.

The set-up of the products have to be made by skilled staff, only.

Repair exclusively made by di-soric.

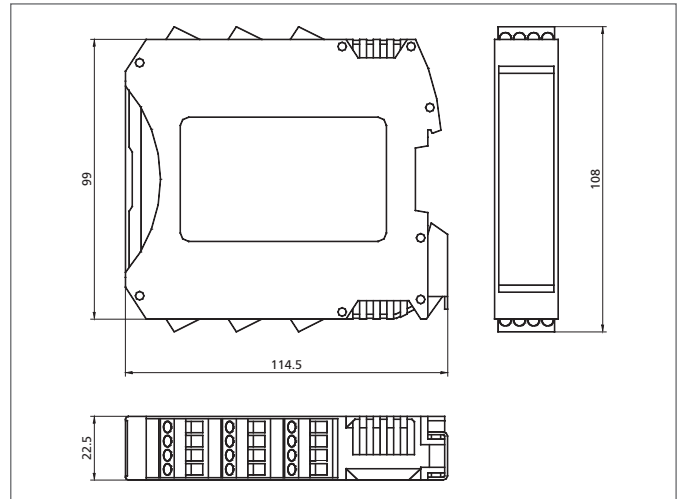

TECHNICAL INFORMATION (typ.)		+20°C, 24 V DC
安全等级		SIL 3 (IEC 61508), SILCL 3 (IEC 62061), PL e - Cat. 4 (EN ISO 13849-1)
安装		rail fastening according to EN 50022-35 standard
操作原理		安全速度监控
尺寸		99 x 22.5 x 114.5 mm (尺寸)
安全输入		TTL 编码器：2个安全输入, 电感式接近开关：2个PNP/NPN安全输入
工作电压		19,2 ... 28,8 V DC
显示		LED灯显示输入状态和故障诊断
环境温度		-10 +55 °C
防护等级		IP 20, (housing), IP 2X, (terminal blocks)
外壳材料		polyamide (with locking latch mounting made of metal)
连接		removable terminal blocks, RJ-45 connector (2x), screw contacts
通讯		5-way high-speed bus 5.0
交货范围		多语言安装板, MS接头-MS-SC
输入频率		最大 500.000 Hz 编码器, 最大 5.000 Hz 电感式接近开关