CS12D15
Connecting cable

- Robustní kovové p evlečné matice
- Flexibilní konstrukce licny
- Dobré odizolovací vlastnosti
- Vysoký stupe krytí

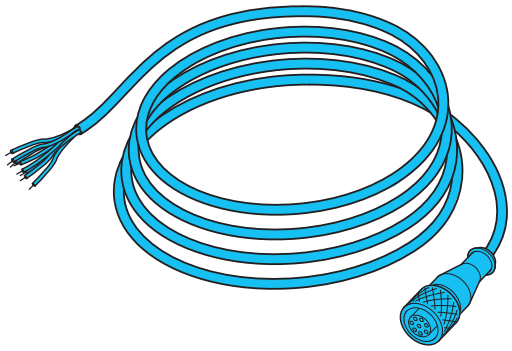

CE

BN = brown
BU = blue
WH = white
GN = green
PK = pink
YE = yellow
BK = black
GY = grey
RD = red
VL = violet
GY/PK = grey/pink
RD/BU = red/blue

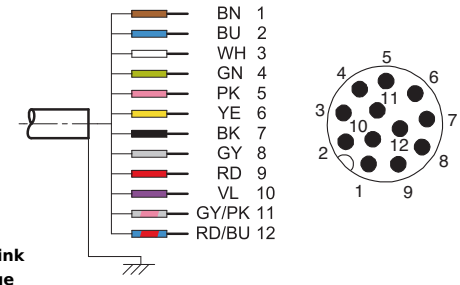

Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.
The set-up of the products have to be made by skilled staff, only.
Repair exclusively made by di-soric.

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Princip činnosti	P ípojný kabel
Velikost	M12 (Závit)
Tvar	P ímý
Délka	15000 mm
Speciální funkce	Kovová matice
Stupe krytí	IP 67
Vhodné pro	P ijímač SLI...
Materiál	PVC (Kabel)
P ipojení	Zásuvka, M12, 12-pólový, Otev ený konec