


BEK-F50/50-G1TI-IBS

Backlight


- Constant level of light intensity over the entire voltage range
- Homogenous luminous field
- High efficiency
- Light intensity can be adjusted

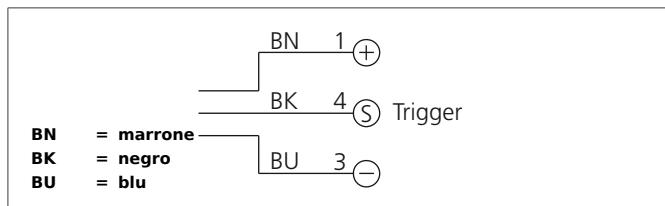

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

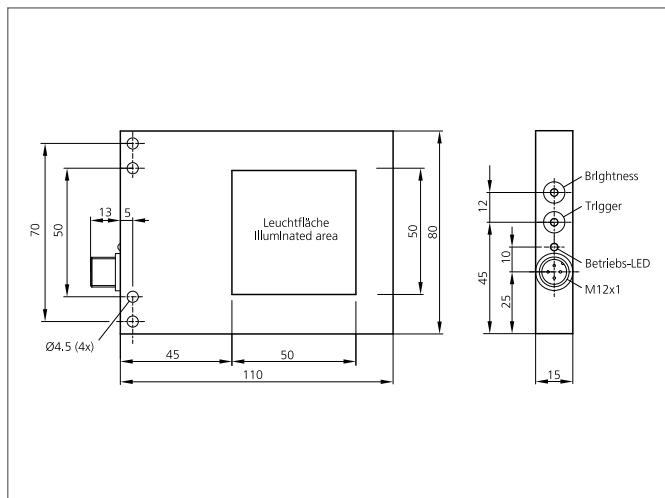

TECHNICAL INFORMATION (typ.)

Design	+20°C, 24V DC
Illuminated area	Backlight
Characteristics	50 x 50 mm
Light colour	Internal control of power output, Trigger input
Service voltage	Red, 625 nm
No-load current	15 ... 35 V DC (Supply Class 2)
Trigger input low level	140 mA, (24 V DC)
Trigger input high level	0 ... < 2,8 V
Power	> 3,3 ... 35 V
Shock-/vibration load	3,4 W (24 V DC)
Inverse polarity protection	10 ... 55 Hz / 1,0 mm / 30 g
Display	Yes
On-delay time (Trig.)	LED: green - Operation
Switch off delay (Trig.)	0,464 ms
Ambient temperature, operation	0,232 ms
Protection class	0 ... +50 °C
Protection degree	IP 67
Risk group (DIN EN 62471)	III, operation on protective low voltage
Casing material	Free group
Material	Aluminium black anodized
Connection	PC, opal diffus (Protection optics)
Connecting cable	Connector, M12, 3-poled
	VK ...