


ID-80-IM3-2-S

Lector de códigos de barras manual




- High speed, omnidirectional reading of 1D, 2D and postal codes
- Manual or automatic triggering
- Low weight for fatigue-free working
- Diseño ergonómico
- Read-feedback by means of LED and audible sound
- 5 años de garantía

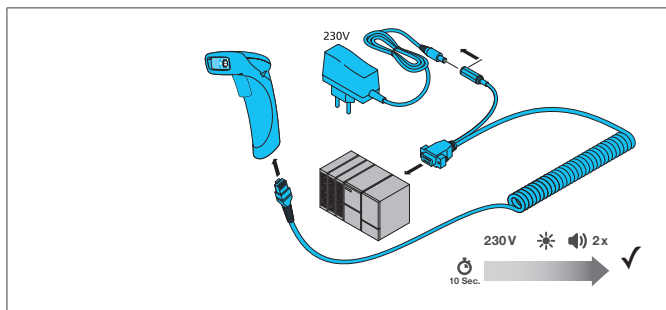

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

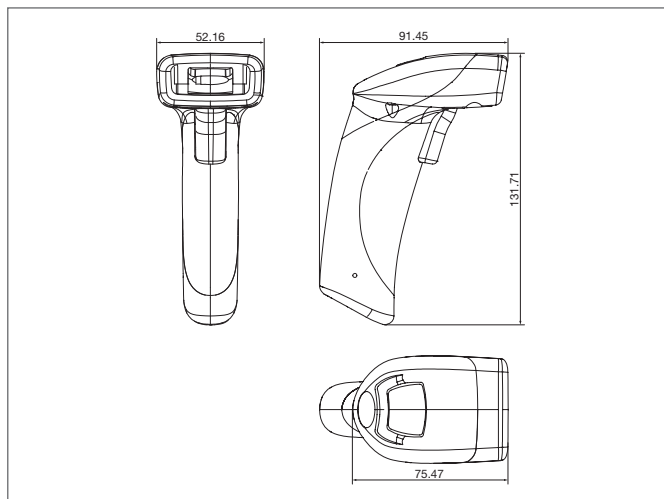

TECHNICAL INFORMATION (typ.)		+20°C, 5V DC
Tamaño	132 x 52 x 91 mm (dimensiones de la carcasa)	
Tensión de alimentación	5 V DC	
Corriente en vacío	< 300 mA	
Resolución	1280 x 960 pixel	
Interface	RS 232 (operado con ID-K-SD/DCJ-RJ50-2)	
Temperatura ambiente, operación	-20 ... +55 °C	
Técnica de protección	IP 54	
Conexión	RS 232, spiral cable, 2,4 m, (incluido en la entrega), including power supply	
Simbología - Códigos 1D (código de barras)	Código 11, Código 32, Código 39, Código 93, Código 128, Interleaved 2 of 5, GSI DataBar, BC 412, Código de barras, IATA 2 of 5, Hong Kong 2 of 5, Matrix 2 of 5, MSI Plessey, NEC 2 of 5, Plessey, Straight 2 of 5, Telepen, Trioptic, UPC / EAN / JAN	
Simbología - códigos 2D	Data Matrix, Data Matrix Rectangular Extension, Código QR, Micro código QR, QR Model 1, Código Aztec, GoCode® (protected - additional license required)	
Symbologies - Stacked codes	PDF 417, Micro PDF, GS1 Composite (CC-A/CC-B/CC-C)	
Peso	110 g	
Position scanner to code	Inclinación 180°, Pitch ± 65°, Oblicuidad ±60°	
Sensor de imagen	CMOS	