

## FMC-SGB2 Column

- 光幕安装和拆卸简单
- 第一个光束高度简单易调
- 由铝型材制作，结实耐用
- 可调角定位
- 内置水平仪来纠正垂直轴的位置




### Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.

The set-up of the products have to be made by skilled staff, only.

Repair exclusively made by di-soric.

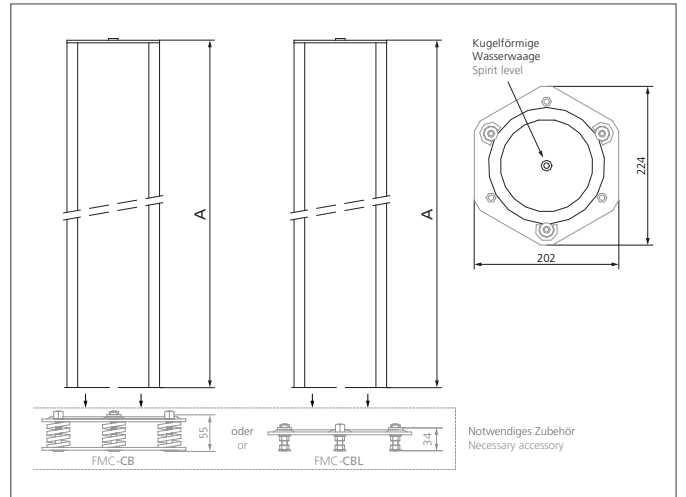

### TECHNICAL INFORMATION (typ.)

总高度 ( A )	1000 mm
操作原理	Mounting column for Safety light frid SLM 4
数量	2 ( 偏转镜 )
特征	内置水平仪
环境温度	-10 +50 ° C (反射镜)
为了	all light curtains with a protected height up to 1210 mm
外壳材料	aluminium extrusion poles, epoxy powder coated, plastics
模型/型号	预装的
交货范围	安装说明, Fixing material
光功率换算系数	15 %