# SP 1500 S
# Deflection mirror

- 需要不止一个安全光幕/光栅
- 能实现四面的圆周保护
- 角度可使用2个随货带的支架来调整定位
- 特殊型号，如有需要，可在反射镜上配一个抗分割的保护膜
- 每个反射镜的光功率减少系数为15%
- 铝型材制作

## Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.
The set-up of the products have to be made by skilled staff, only.
Repair exclusively made by di-soric.

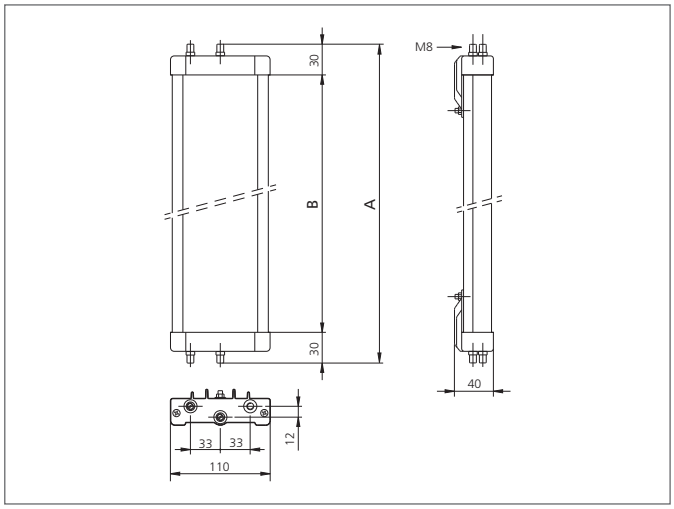


| TECHNICAL INFORMATION (typ.) | |
|---|---|
| 总高度（A） | 1660 mm |
| 操作原理 | 偏转镜 |
| 环境温度 | -10 … +55 ° C (反射镜) |
| 为了…… | 1510 mm protective field height |
| 外壳材料 | aluminium extrusion poles, epoxy powder coated, plastics |
| 模型/型号 | 自由调节 |
| 交货范围 | 安装说明, 2个可调固定支架, Fixing material |
| 光功率换算系数 | 15 % |
| 偏转镜（B） | 1600 mm |

**di-soric** GmbH & Co. KG ■ Steinbeisstraße 6 ■ DE-73660 Urbach
Fon + 49 (0) 71 81 / 98 79 - 0 ■ Fax + 49 (0) 71 81 / 98 79 - 179 ■ info@di-soric.com ■ www.di-soric.com