


BE-A30/30-G5-K-BS

High power barlight




- High light intensity
- A minimal edge region
- 均匀的发光场
- 非常简约的设计
- 高防护等级, IP67
- 结实耐用的设计

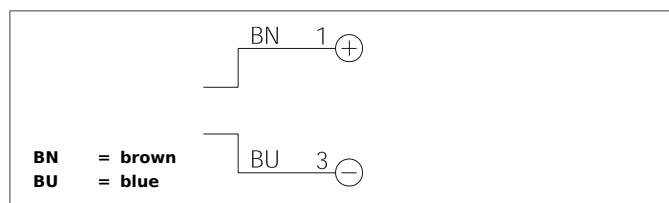

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

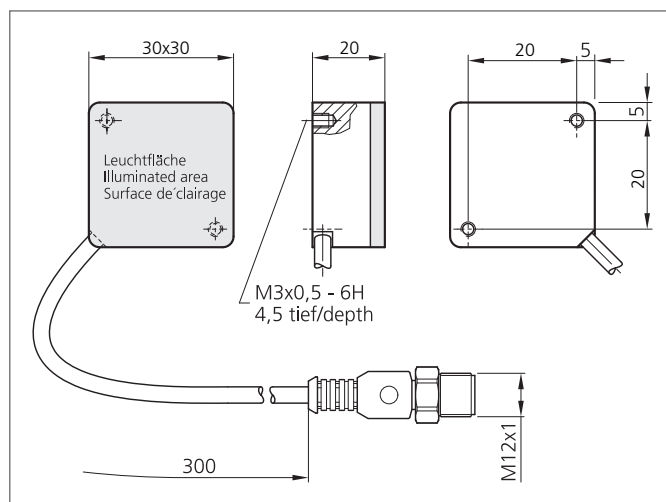

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
设计		条形光源
照明区域		30 x 30 mm
光的颜色		White, 5000 K
发射角度		130 °
照明密度		2.1 klx (0.1 m), 600 Lux (0.2 m), 300 Lux (0.3 m)
工作电压		24 V DC (Supply Class 2)
内部功耗		46 mA, (24 V DC)
功率		1,1 W (24 V DC)
负载振荡		10 ... 55 Hz / 1,0 mm / 30 g
极性接反保护		No
环境温度		0 ... +40 ° C (持续温度)
防护等级		IP 67
防护等级		III, 在保护性低电压下工作
危险类 (DIN EN62471标准)		Free group
外壳材料		Aluminium black anodized
材料		PMMA, clear (保护光元件)
连接		Cable, 0,3 m, with connector, M12, 3-poled
重量		45 g
Connecting cable		VK ...