



CS12D5

Connecting cable

- Sturdy metal coupling ring
- Flexible lead design
- Good stripping properties
- High protection class

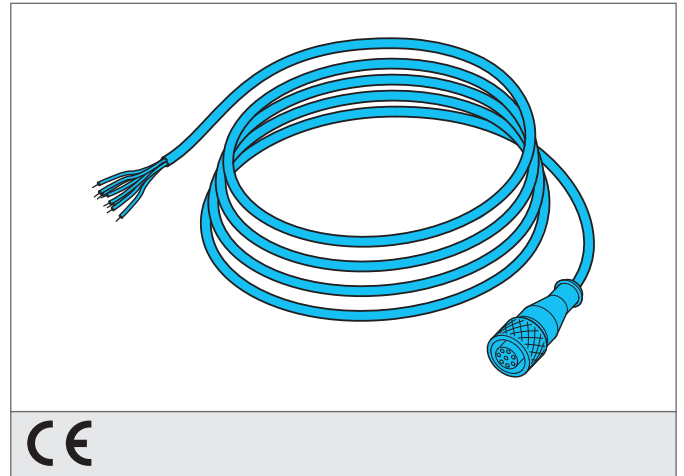

CE

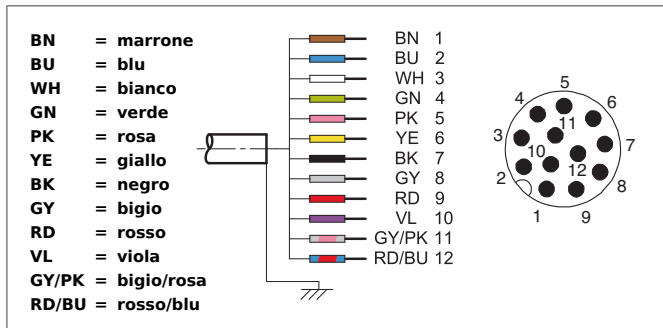

Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.
 The set-up of the products have to be made by skilled staff, only.
 Repair exclusively made by di-soric.

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Operating principle	Connection cable
Size	M12 (thread)
Design	straight
Length	5.000 mm
Characteristics	metal coupling ring
Protection class	IP 67
Suitable for	receiver SLM4
Material	PVC (Cable)
Connection	Socket, M12, 12-poled, flying leads