

MC 25

MS - Connecting cable RS485



- Flexible lead design
- Good stripping properties
- Shielded

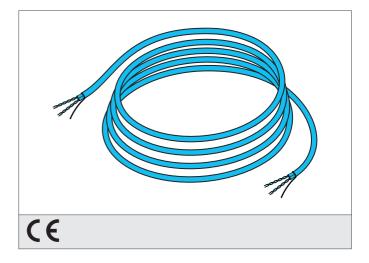



Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.

The set-up of the products have to be made by skilled staff, only. Repair exclusively made by di-soric.

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Operating principle	Connecting cable RS485
Design	open ends
Length	25.000 mm
Characteristics	shielded
Suitable for	Connection of MS-CTx interface modules
Version	Serial RS485 cable
Connection	flying leads, 5-poled