


FMC-SB3


Column with deflection mirror

- For the realization of circumferential protections up to 4 sides
- Not more than one safety light curtain / -grid necessary
- Special models equipped with a protective anti-fragmentation film on the mirrors available on request
- Robust column made by aluminium extrusion poles
- With adjustable angular orientation
- Optical power reduction factor 15% for each mirror
- Built-in spirit level for a correct positioning of the vertical axis

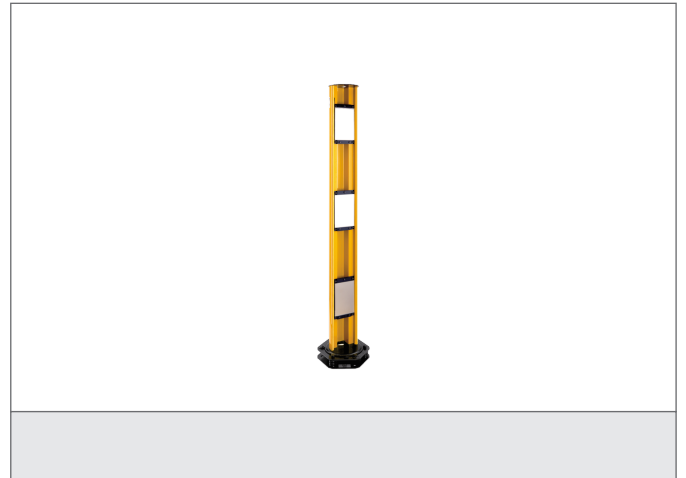

Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.
The set-up of the products have to be made by skilled staff, only.
Repair exclusively made by di-soric.

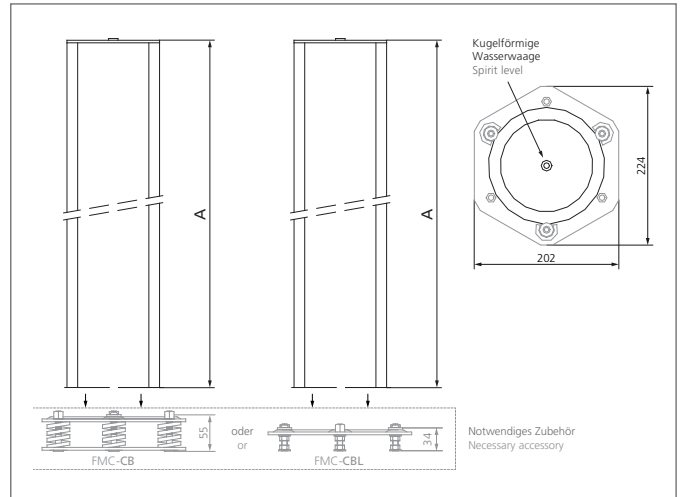

TECHNICAL INFORMATION (typ.)

| | |
|--------------------------------|--|
| Total height (A) | 1200 mm |
| Operating principle | Mounting column with deflection mirror |
| Number | 3 (deflection mirrors) |
| Characteristics | built-in spirit level |
| Ambient temperature, operation | -10 ... +50 °C (mirrors) |
| Suitable for | 3 beam security light grids |
| Casing material | aluminium extrusion poles, epoxy powder coated, plastics |
| Version | freely adjustable |
| Scope of delivery | assembly instruction, Fixing material |
| Optical power reduction factor | 15 % |