

## IOL-Master

### IO-Link Device Tool


- Universal IO-Link Master with computer software
- For devices with IODD specification 1.0.1 and 1.1
- Status LED for IO-Link and SIO mode
- M12-connection for devices
- Up to 80 mA with USB connection
- Up to 1 A with AC adapter



## Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

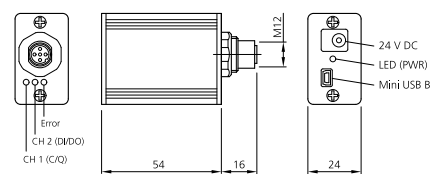

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Inverse polarity protection	Yes
Ambient temperature, operation	0 ... +45 °C
Protection class	IP 20
Protection degree	III, operation on protective low voltage
Connection	USB, (Mini USB B), TYPE 2.0
Connection 2	Socket, M12
Power supply	5 V / 500 mA (PC USB), 24 V / 80 mA (IO-Link Device from USB), 24 V / 1 A (IO_Lik Device from Power Supply)
Communication	IO-Link Spezifikation V 1.1, IO-Link Port Class A
Scope of delivery	USB IO-Link Master V2, USB A-B Cable, Power Supply 24 V DC / 24 W