



Spotlight

- Extrem small design
- Homogenous illumination
- Protection class IP 67
- All-purpose trigger input
- High efficiency
- Low levels of heat produced
- Robust metal casing

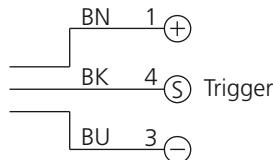

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

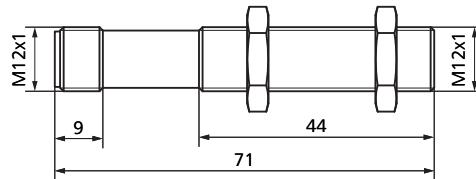

TECHNICAL INFORMATION (typ.)

Size	+20°C, 24V DC
Characteristics	M12 x 1 (thread)
Light colour	Internal control of power output, Trigger input
Emission angle FWHM	White, 6000 K
Illumination intensity	25°
Service voltage	4.0 klx (0.1 m), 1.0 klx (0.2 m), 200 Lux (0.5 m)
No-load current	10 ... 30 V DC (Supply Class 2)
Light outlet	< 120 mA, (10 V DC)
Trigger input low level	axial
Trigger input high level	< 3 V
Power	> 4 V
Shock-/vibration load	1,2 W (24 V DC)
Inverse polarity protection	10 ... 55 Hz / 1,0 mm / 30 g
On-delay time (Trig.)	Yes
Switch off delay (Trig.)	0,012 ms
Ambient temperature, operation	0,012 ms
Protection class	0 ... +40 °C
Protection degree	IP 65, IP 67
Risk group (DIN EN 62471)	III, operation on protective low voltage
Casing material	Risk group 1
Material	brass nickel plated
Connection	PMMA (Protection optics)
Connecting cable	Connector, M12 x 1, 4-poled
	VK ...