


BEK-A500-G0T-K-BS

Barlight




- Extremely high light intensity thanks to most modern high power LEDs
- Integrated single-line power control with high efficiency
- Intelligent temperature control with switch-off automatic
- Homogeneous light field thanks to special LED-optics
- High protection class
- Separate entries for trigger signal and trigger polarity
- Robust metal casing
- Universal mounting possibility
- Scratch-proof protection window
- Mounts und Optics available as an option

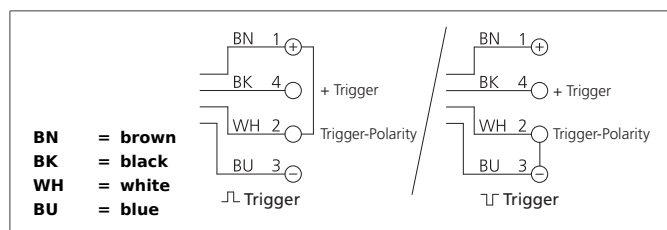

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

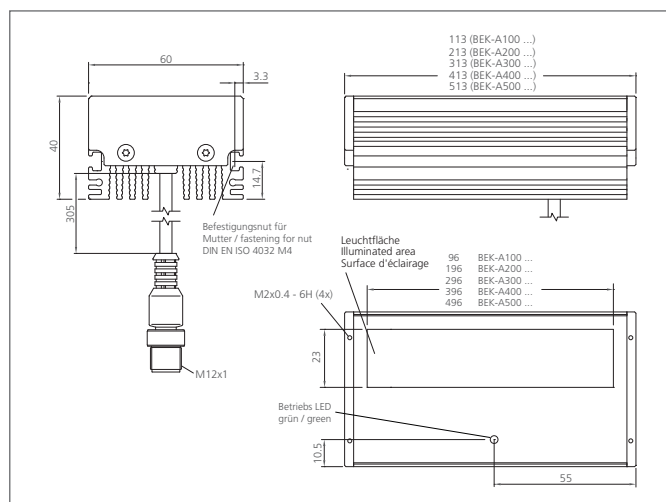

TECHNICAL INFORMATION (typ.)	
Design	Barlight
Illuminated area	23 x 496 mm
Characteristics	Internal control of power output
Light colour	Infrared, 850 nm
Emission angle FWHM	30°
Illumination intensity	32500 µW/cm² (0.1 m), 17200 µW/cm² (0.2 m), 6800 µW/cm² (0.5 m)
Service voltage	18 ... 30 V DC (Supply Class 2)
No-load current	1.850 mA, (24 V DC)
Trigger input low level	0 ... < 2,8 V
Trigger input high level	> 3,3 ... 30 V
Power	42,5 W (24 V DC)
Shock/vibration load	10 ... 55 Hz / 1,0 mm / 30 g
Inverse polarity protection	Yes
Display	LED: green - Operation
Ambient temperature, operation	0 ... +40 °C
Protection class	IP 67
Protection degree	III, operation on protective low voltage
Risk group (DIN EN 62471)	Risk group 1
Casing material	Aluminium black anodized
Material	PMMA, hardcoated (protective glass)
Connection	Cable, 0,3 m, + connector M12, 4-poled
Weight	1650 g

BEK-A500-G0T-K-BS
Barlight



TECHNICAL INFORMATION (typ.)

+20°C, 24V DC

Connecting cable

VK ...