



- 小尺寸的设计
- 同质光源
- IP67防护等级
- All-purpose trigger input
- 高效率
- 产生较小的热量
- 结实的金属外壳

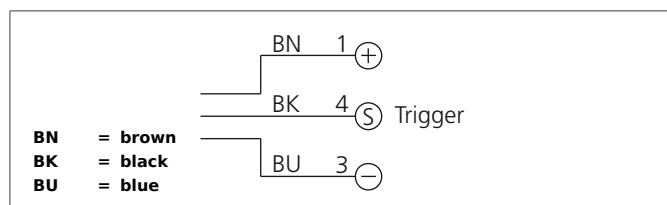

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

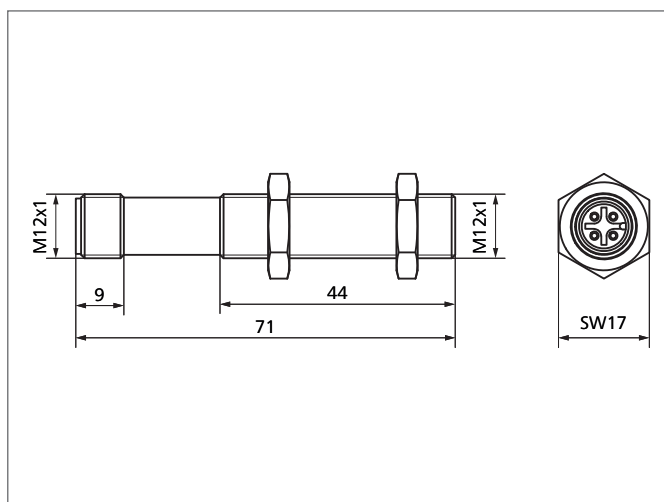

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
尺寸		M12 x 1 (thread)
特征		功率输出的内部控制, 触发输入
光的颜色		Red, 625 nm
发射角度		25 °
照明密度		1.7 klx (0.1 m), 450 Lux (0.2 m), 75 Lux (0.5 m)
工作电压		10 ... 30 V DC (Supply Class 2)
内部功耗		< 80 mA, (10 V DC)
发光口		轴向
输入低电平触发		< 3 V
输入高电平触发		> 4 V
功率		0,75 W (24 V DC)
极性接反保护		是
开启滞后时间 (触发)		0,012 ms
关闭滞后时间 (触发)		0,012 ms
环境温度		0 +40 ° C
防护等级		IP 65, IP 67
防护等级		III, 在保护性低电压下工作
危险类 (DIN EN62471标准)		Free group
外壳材料		brass nickel plated
材料		PMMA (保护光元件)
连接		Connector, M12 x 1, 4-poled
Connecting cable		VK ...