



- 非常简约的设计
- 均匀的发光场
- 可使用前端出线或者后端出线
- 通用性安装
- 金属外壳
- 同质光源
- 高效率
- 结实的金属外壳

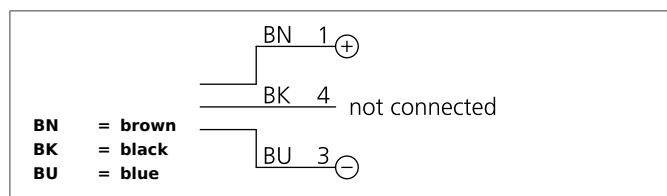

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

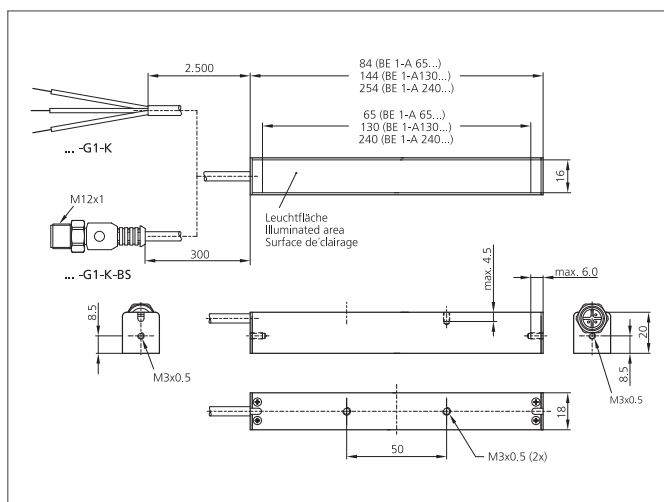

TECHNICAL INFORMATION (typ.)

+20°C, 24V DC

设计	条形光源
照明区域	130 mm
光的颜色	Red, 630 nm
发射角度	40 °
照明密度	6.0 klx (0.1 m), 2.1 klx (0.2 m), 350 Lux (0.5 m)
工作电压	24 V DC (Supply Class 2)
内部功耗	< 170 mA, (24 V DC)
功率	4,1 W (24 V DC)
负载振荡	10 ... 55 Hz / 1,0 mm / 30 g
环境温度	0 +40 °C
防护等级	IP 20
防护等级	III,在保护性低电压下工作
危险类 (DIN EN62471标准)	Free group
外壳材料	Aluminium anodized
材料	PUR (电缆)
连接	Cable, 0,3 m, M12
Connecting cable	VK ...