

FMC-S1700

Column with deflection mirror

- 能实现四面的圆周保护
- 需要不止一个安全光幕/光栅
- 特殊型号，如有需要，可在反射镜上配一个抗分割的保护膜
- 由铝型材制作，结实耐用
- 可调角定位
- 每个反射镜的光功率减少系数为15%
- 内置水平仪来纠正垂直轴的位置




Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.

The set-up of the products have to be made by skilled staff, only.

Repair exclusively made by di-soric.

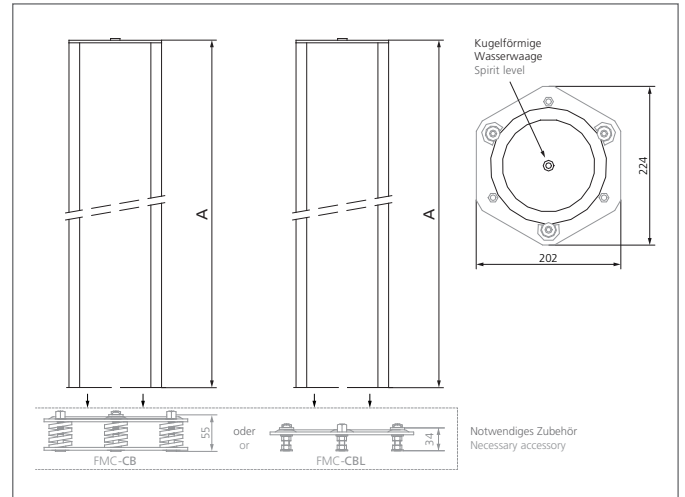

TECHNICAL INFORMATION (typ.)

总高度 (A)	1670 mm
操作原理	带偏转镜的安装条
数量	1 (偏转镜)
特征	内置水平仪
环境温度	-10 +50 ° C (反射镜)
为了	all light curtains with a protected height up to 1210 mm
外壳材料	aluminium extrusion poles, epoxy powder coated, plastics
模型/型号	预装的
交货范围	安装说明, Fixing material
光功率换算系数	15 %