
R 100x100

Reflector


#di-soric

- For infrared and red light
- Heat-resistant until 80 °C
- Hole Ø3.8 mm (2x)
- Suitable for polarized light

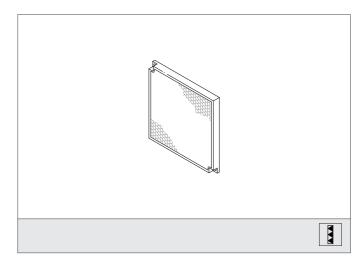

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.



TECHNICAL INFORMATION (typ.)	+20°C, 24V DC	
Mounting	2 holes	
Size	100×100 mm (Surface) 9 mm (Height)	
Design	rectangular	
Emitted light	Infrared and red	
Ambient temperature, operation	-20 +60 °C	
Version	Reflector	