



- 快速安装，无需设置
- 没有调错的风险
- 高防护等级，IP67
- 响应时间短
- 对尘土不敏感
- 静态操作原理
- 金属插头

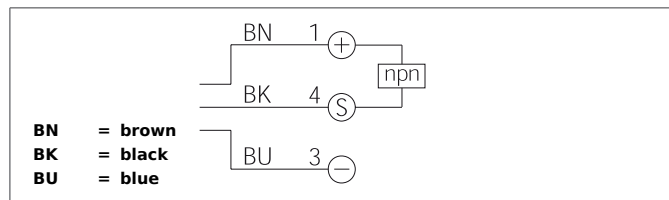

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

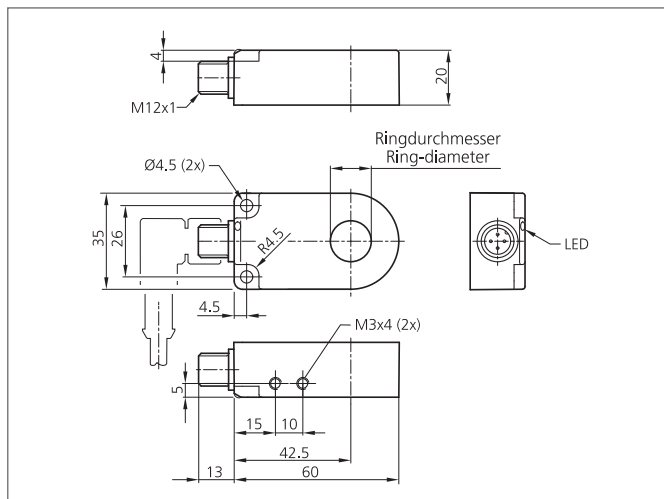

TECHNICAL INFORMATION (typ.)		+20 °C, 24V DC
操作原理		静态
环形尺寸		10.1 mm
工作电压		10 ... 35 V DC (Supply Class 2)
内部功耗		< 11 mA
分辨率		2,0 mm
灵敏度调节		没有设置元素
开关输出		npn, 200 mA, NO
负载振荡		10 ... 55 Hz / 1,0 mm / 30 g
被检产品速度		< 35 m/s
脉冲延展		150 ms
压降		< 2,0 V
准备延迟		< 300 ms
环境温度		-25 +70 ° C
绝缘电压		1.000 V
防护等级		IP 67
防护等级		III,在保护性低电压下工作
外壳材料		polyamide / ring POM
连接		Connector, M12, 4-poled
Connecting cable		VK ...