

## **CD 95**

## **Connecting cable**

**#di-soric** 

- Sturdy metal coupling ring
- Flexible lead design
- Good stripping properties
- High protection class

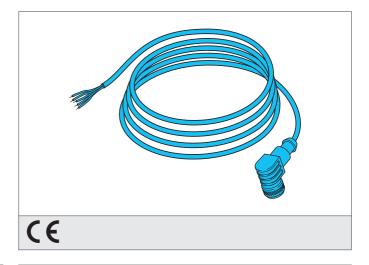




## **Safety instructions**

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.

The set-up of the products have to be made by skilled staff, only.

The set-up of the products have to be made by skilled staff, only Repair exclusively made by di-soric.

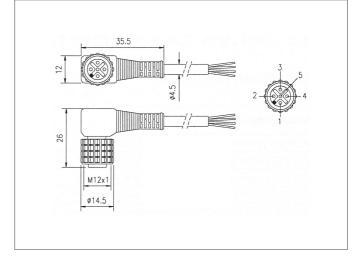

| +20°C, 24V DC                      |
|------------------------------------|
| Connection cable                   |
| M12 (thread)                       |
| angled                             |
| 5.000 mm                           |
| metal coupling ring                |
| IP 67                              |
| SLB and emitter SLI                |
| PVC (Cable)                        |
| Socket, M12, 5-poled, flying leads |
|                                    |
|                                    |