

CDM 99 Connector

- High protection class
- Robust design
- Metal connector

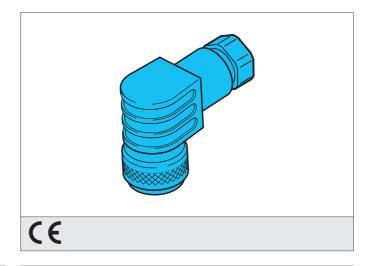


III, di-soric



Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to. The set-up of the products have to be made by skilled staff, only. Repair exclusively made by di-soric.



TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Operating principle	Connector
Size	M12 (thread)
Design	angled
Characteristics	metal coupling ring
Protection class	IP 67
Suitable for	SLB and emitter SLI
Material	PVC (Cable)
Connection	Socket, M12, 5-poled, with screw terminal and PG9 cable gland

di-soric GmbH & Co. KG ■ Steinbeisstraße 6 ■ DE-73660 Urbach

209833

Fon + 49 (0) 71 81 / 98 79 - 0 🖩 Fax + 49 (0) 71 81 / 98 79 - 179 🗉 info@di-soric.com 🗉 www.di-soric.com 💿 di-soric | Subject to modifications | 22/02/20 | Page 1 (1)