



- 在整个电压范围内都能保持恒光强度水平
- 均匀的发光场
- 高效率
- 光密度可调

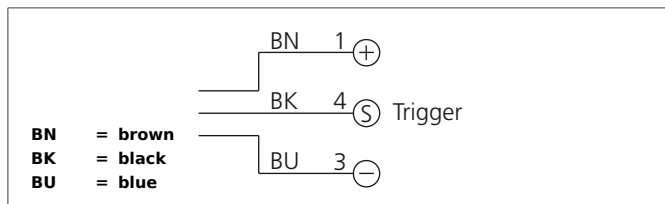

**Safety instructions**

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.  
 These instruments shall exclusively be used by qualified personnel.

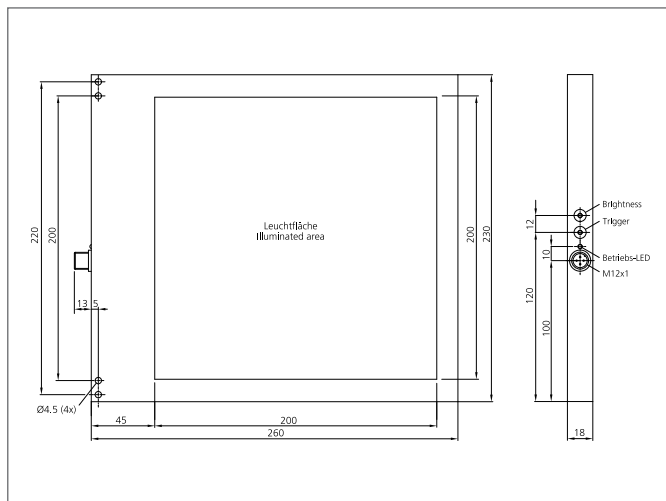

TECHNICAL INFORMATION (typ.)	
设计	+20°C, 24V DC
照明区域	背景光源
特征	200 x 200 mm
光的颜色	功率输出的内部控制, 触发输入
工作电压	Green, 525 nm
内部功耗	18 ... 35 V DC (Supply Class 2)
输入低电平触发	550 mA, (24 V DC)
输入高电平触发	0 < 2,8 V
功率	> 3.3 35 V
负载振荡	13,2 W (24 V DC)
极性接反保护	10 ... 55 Hz / 1,0 mm / 30 g
显示	是
环境温度	LED灯: 绿色, 工作状态
防护等级	0 +50 °C
防护等级	IP 67
危险类 (DIN EN62471标准)	III,在保护性低电压下工作
外壳材料	Free group
材料	Aluminium black anodized
连接	PC, opal diffus (保护光元件)
Connecting cable	Connector, M12, 3-poled
	VK ...