BEK-A100-DIF
Diffusor

- Diffusion filter
- Homogenous light reduction
- Quick and easy fix and mounting
- Scratch-proof protection window
- Mounting materials included in scope of delivery

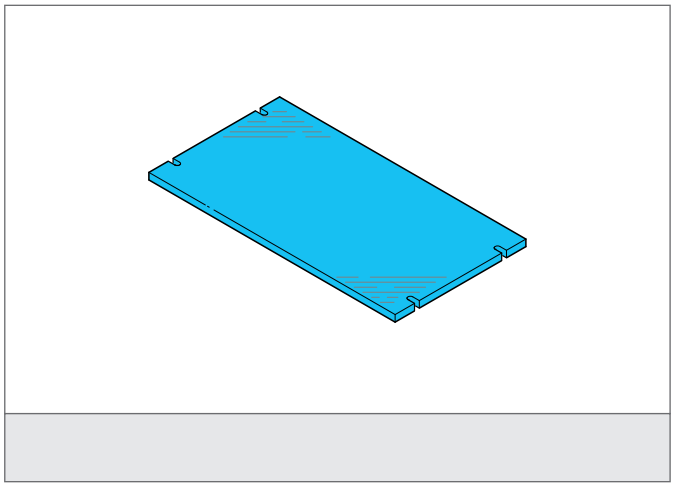

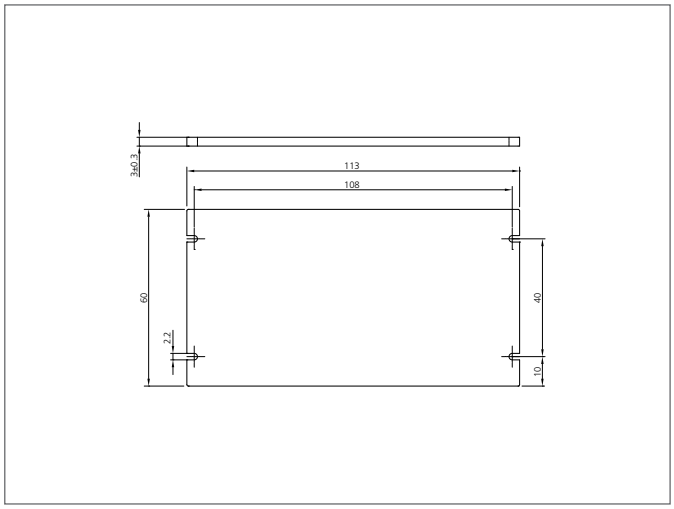

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Characteristics	Mounting hardware included
Shock-/vibration load	10 ... 55 Hz / 1,0 mm / 30 g
Suitable for	Bar lights BE-A100..., Bar lights BEK-A100...
Material	PMMA, hardcoated (Window)