

## CD 50 Connecting cable




- Sturdy metal coupling ring
- Flexible lead design
- Good stripping properties
- High protection class

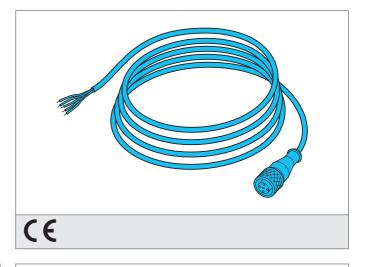



## Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to. The set-up of the products have to be made by skilled staff, only. Repair exclusively made by di-soric.



| TECHNICAL INFORMATION (typ.) | +20°C, 24V DC                      |
|------------------------------|------------------------------------|
| Operating principle          | Connection cable                   |
| Size                         | M12 (thread)                       |
| Design                       | straight                           |
| Length                       | 50.000 mm                          |
| Characteristics              | metal coupling ring                |
| Protection class             | IP 67                              |
| Suitable for                 | SLB and emitter SLI                |
| Material                     | PVC (Cable)                        |
| Connection                   | Socket, M12, 5-poled, flying leads |
|                              |                                    |

di-soric GmbH & Co. KG ■ Steinbeisstraße 6 ■ DE-73660 Urbach

209831

Fon + 49 (0) 71 81 / 98 79 - 0 
Fax + 49 (0) 71 81 / 98 79 - 179 
info@di-soric.com www.di-soric.com © di-soric | Subject to modifications | 21/02/20 | Page 1 (1)