

CD 50

Connecting cable

#di-soric


- Sturdy metal coupling ring
- Flexible lead design
- Good stripping properties
- High protection class

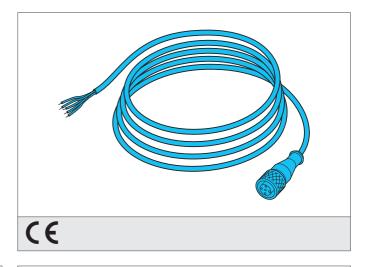



Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.
The set-up of the products have to be made by skilled staff, only. Repair exclusively made by di-soric.



| TECHNICAL INFORMATION (typ.) | +20°C, 24V DC |
|------------------------------|------------------------------------|
| Operating principle | Connection cable |
| Size | M12 (thread) |
| Design | straight |
| Length | 50.000 mm |
| Characteristics | metal coupling ring |
| Protection class | IP 67 |
| Suitable for | SLB and emitter SLI |
| Material | PVC (Cable) |
| Connection | Socket, M12, 5-poled, flying leads |
| | |