DCC 12 M 08 NOLK
Inductive Proximity Switch

- Vysoce flexibilní kabel
- Integrovaný zesilovač
- Ochrana proti zkratu
- Potlačení pulzu p i zapnutí
- LED



BN = **brown**
BK = **black**
BU = **blue**

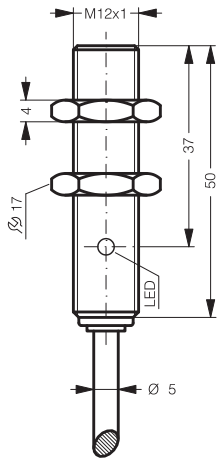

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Princip činnosti	Indukční
Vyhodnocení	Digitální
Velikost	M12 x 1 (Závit)
Tvar	Závit
Montáž	Kvazi zapušt ná montáž
Speciální funkce	Mimo ádn vysoká snímací vzdálenost
Pracovní vzdálenost	8 mm
Standardní m icí deska	32 x 32 x 1 mm
Provozní nap tí	10 ... 30 V DC
Vlastní spot eba energie	< 10 mA
Spínací výstup	npn, 200 mA, NC
Spínací hystereze	< 10 %
Odolnost v či ráz m/ vibracím	10 ... 55 Hz / 1,0 mm / 30 g
Pokles nap tí	< 2,0 V
Spínací kmitočet, frekvence	300 Hz
Teplota okolí, provoz	-25 ... +70 °C
Izolační nap tí	500 V
Stupe krytí	IP 67
Materiál pouzdra	Mosaz Poniklováno
Materiál	PVC (Kabel)
P ipojení	Kabel, 2,0 m