


- 盲区小
- 狭窄的扫描区域
- 耐油
- 不受背景的影响
- 轴向滞后可调



Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments. These instruments shall exclusively be used by qualified personnel.

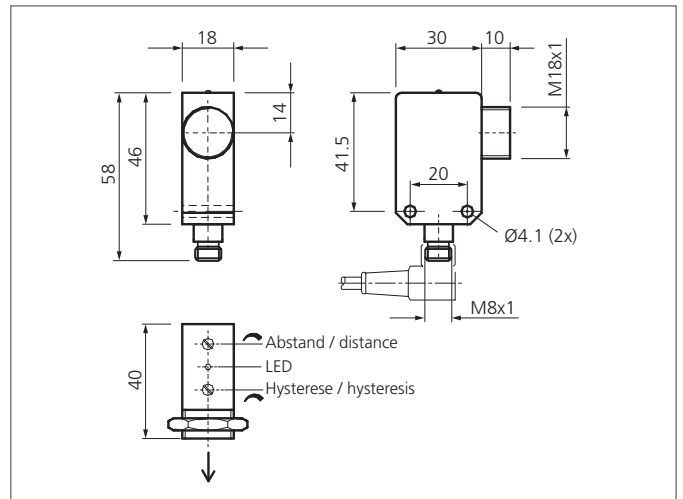

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
操作原理		超声波传感器
评估		数字的
尺寸		46 x 30 x 18 mm (尺寸)
设计		方形设计
工作电压		12 ... 28 V DC
内部功耗		45 mA
工作距离		60 ... 150 mm
开关输出		pnp, 100 mA, NO
开关滞后		10 ... 40 %
工作频率		350 kHz
负载振荡		10 ... 55 Hz / 1,0 mm / 30 g
工作频率		15 Hz
反应时间/释放时间		5,0 ms / 40 ms
重复定位精度		< 1 % / Sn max.
环境温度		-20 +50 ° C
温度漂移		-0,1 %/K (开关输出), -0,17 %/K (air path)
绝缘电压		500 V
防护等级		IP 67
外壳材料		stainless steel, plastics V2A (1.4301 / AISI 304), (Polyamide - PA)
连接		M8, 3-poled