

IOL-Master IO-Link Device Tool




- Universal IO-Link Master with computer software
- For devices with IODD specification 1.0.1 and 1.1
- Status LED for IO-Link and SIO mode
- M12-connection for devices
- Up to 80 mA with USB connection
- Up to 1 A with AC adapter



Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

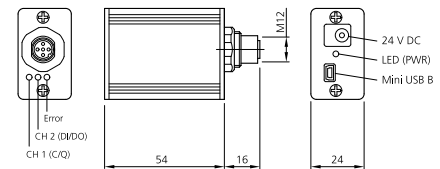

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
Protección a la inversión de polaridad		Sí
Temperatura ambiente, operación		0 ... +45 °C
Técnica de protección		IP 20
Grado de protección		III, funcionamiento en bajo voltaje
Conexión		USB, (Mini USB B), TYPE 2.0
Connection 2		Socket, M12
Alimentación		5 V / 500 mA (PC USB), 24 V / 80 mA (IO-Link Device from USB), 24 V / 1 A (IO_Lik Device from Power Supply)
Comunicación		IO-Link Spezifikation V 1.1, IO-Link Port Class A
Scope of delivery		USB IO-Link Master V2, USB A-B Cable, Power Supply 24 V DC / 24 W