


AV2-UND/ODER-PS-IBS

Distribuidor


- Apropriado para todos los sensores convencionales
- Función de contacto AND/OR conmutable
- Construcción compacta
- Adaptación rápida y sencilla
- Elevada resistencia a la temperatura
- Elevado grado de protección

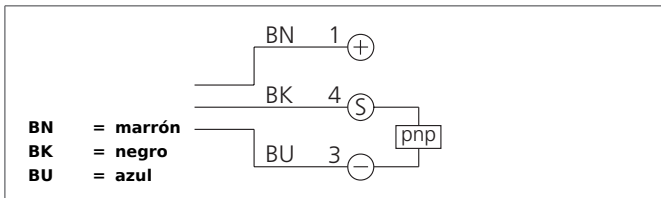

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

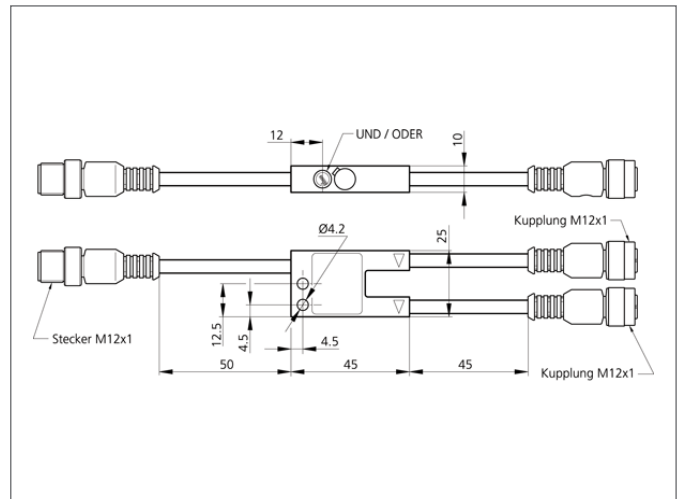

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
Tensión de alimentación		10 ... 35 V DC
Corriente en vacío		14 mA
Salida de conmutación		pnp, 200 mA, AND / OR
Temperatura ambiente, operación		-25 ... +70 °C
Técnica de protección		IP 67
material de la carcasa		Zincado extruído negro laqueado
Conexión		Conector, M12, 3-polos
Connection 2		Unión, M12, 3-polos