


-

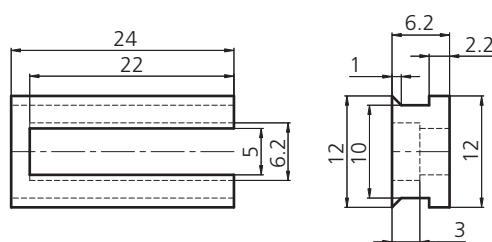

+20°C, 24V DC

at dovetailed cylinder

Cylinder sensores with T-Slot

Aluminium