



Focus Optic



- To increase the illuminance for small objects or high distances
- O-ring included
- Quick and easy fix and mounting

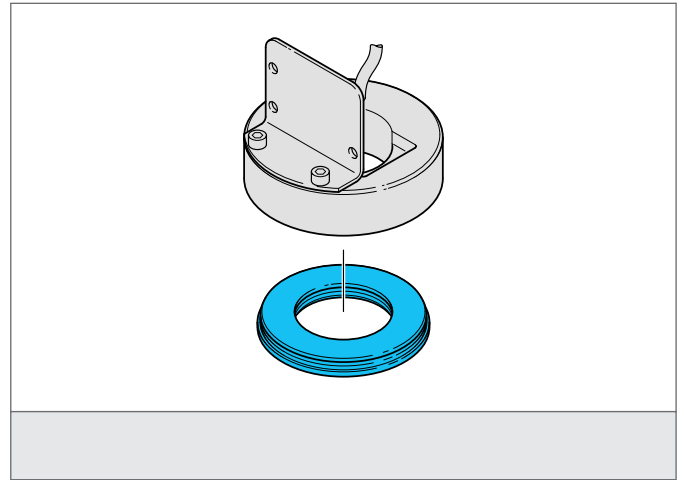

	BEK-R33-E0T-...		BEK-R33-E1T-...		BEK-R33-E5T-...	
	(mm)		(mm)		(mm)	
Abstand	500	1.000	500	1.000	500	1.000
Nutzbarer Lichtfleck- durchmesser	260		320	575	245	450
Eingeschränkt nutzbarer Lichtfleck- durchmesser	390		380	725	345	635



TECHNICAL INFORMATION (typ.)

Characteristics

Suitable for

Casing material

+20°C, 24V DC

Mounting hardware included

Ringlight BEK-R33 ...

PMMA