



Focus Optic



- To increase the illuminance for small objects or high distances
- O-ring included
- Rapide fixation et installation

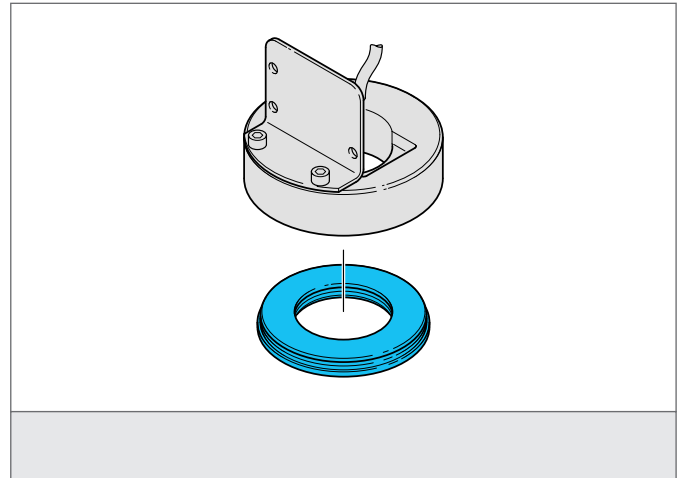

	BEK-R33-E0T.... (mm)		BEK-R33-E1T.... (mm)		BEK-R33-E5T.... (mm)	
Abstand	500	1.000	500	1.000	500	1.000
Nutzbarer Lichtfleck- durchmesser	260		320	575	245	450
Eingeschränkt nutzbarer Lichtfleck- durchmesser	390		380	725	345	635



CARACTÉRISTIQUES TECHNIQUES (typ.)

Caractéristiques

Approprié pour

Matériau du boîtier

+20°C, 24V DC

Mounting hardware included

Ringlight BEK-R33 ...

PMMA