BS-W-8/4
Conector

- Carcasa plástica
- Rosca metálica
- Conexión soldable
- Elevado grado de protección hasta IP67
- Salida de cable 4 x 90° giratorio

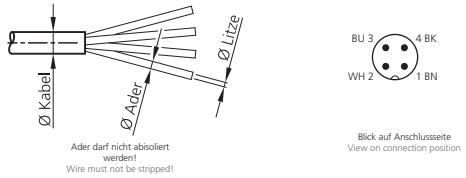

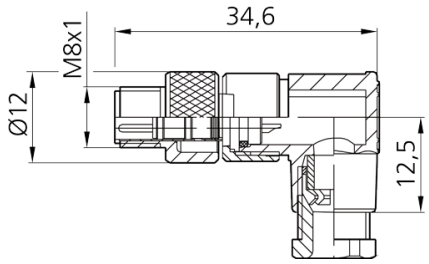

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Diseño	angular
Técnica de protección	IP 67
material de la carcasa	Plásticos
Connection sensor side	Field-wireable, Solder connection, 4-polos
Connection control side	Connector, M8x1, 4-polos
Para dimámetro de cable	3,5 ... 5,0 mm
Para trenzas	0,25 ... 0,34 mm²