



MS-Z-8/4/0.14 Connector

- Metal/plastic housing
- Turnable metal screw
- Quick mounting without tools
- High protection class by IP 67

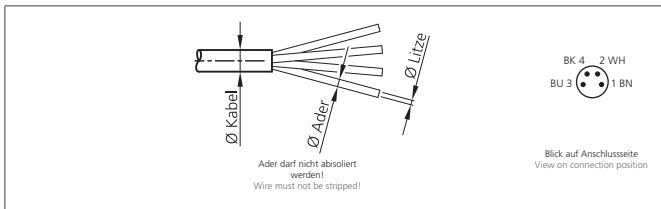

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

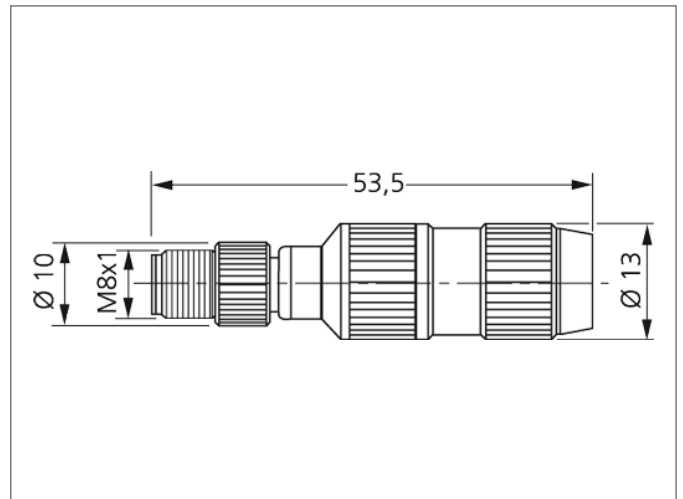

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
Design		straight
Service voltage		32 V DC
Ambient temperature, operation		-25 ... +85 °C
Protection class		IP 67
Casing material		Metal/Plastic
Connection sensor side		Field-wireable, Insulation displacement connectors, 4-poled
Connection control side		Connector, M8x1, 4-poled
For cable diameters		2,5 ... 5,1 mm
For Ø vein		1,0 ... 1,6 mm, (Wire must not be stripped!)
For stranded wire cross section		0,14 ... 0,34 mm²