


BE-DOME100/70-G1-T4

Dome light

- Exceptionally homogenous and diffuse illumination
- Velmi kompaktní konstrukce
- High light intensity
- Robustní konstrukce

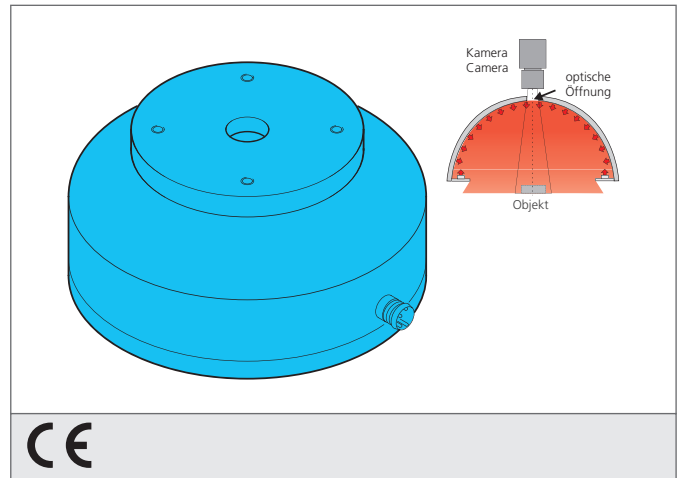


	PIN	Aderfarbe wire color	Funktion function
	3	blau / blue	- blau / blue
	1	braun / brown	+ 24V

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

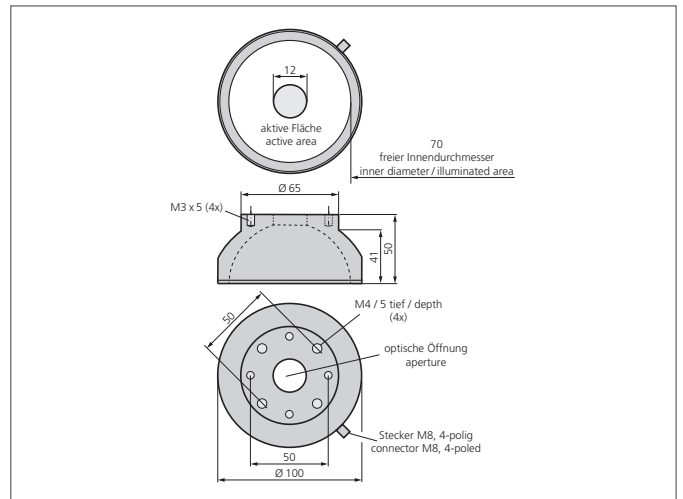

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Velikost	Ø 100 mm (Pr m r)
Osv tlená oblast	Ø 70 mm
Počet	32 LEDs
Barva sv tla	Červené, 617 nm
Vyza ovací úhel FWHM	120°
Provozní nap tí	24 V DC
Výkon	1,7 W 70 mA, (24 V DC)
Spot eba proudu	70 mA
Teplota okolí, provoz	0 ... +50 °C
T ída ochrany	III, p ípojení k bezpečnému malému nap tí
Riziková skupina (DIN EN 62471)	Volná skupina
Materiál pouzdra	Hliník, Plast
P ípojení	Konektor, M8, 4-pólový